Especificación	
Nombre del producto:	Detector de humo independiente, sensor de humo inalámbrico, alarma de humo
Tamaño:	Ø106mm * 59mm
Tensión de trabajo:	Batería 9V 6F22
Corriente de espera:	≤15uA
Corriente de alarma:	≤56mA
Vida útil de la batería:	Menos de 1 año
Indicador de encendido:	RLED ed
Indicador de alarma:	Red LED flash parpadear
Presión de sonido:	85dB / m
Temperatura de trabajo:	-10 ° C ~ 50 ° C
Humedad de trabajo:	≤95% RH
Distancia de transmisión:	& lt; 100m (área abierta)
Ejecutar el criterio:	EN14604
Área de detección:	40 metros cuadrados cuando la altura de la instalación entre 6 y 12 metros. 20 metros cuadrados cuando la altura de la instalación dentro de 6 metros.

¿Qué características de nuestro detector de humo?

Standalone Gas detector

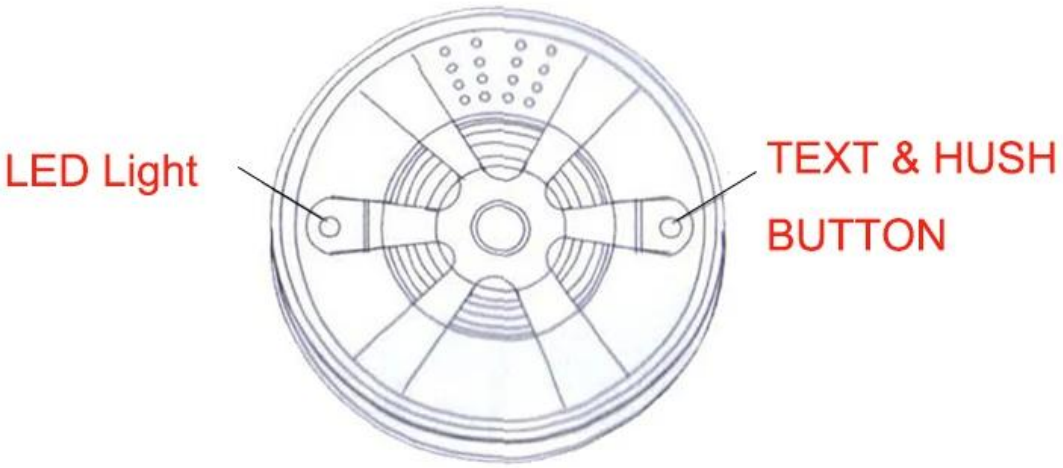

The detector adopts the reflection principle of smoke particles that can reflect infrared light The main circuit includes a MCU processing Section,an infrared-emitting portion and an infrared receiving portion.

Detector will get into normal working state after connecting battery power, LED will flash once per every 42 seconds.

TIPOLOGÍA EN ESPECIE

MOSTRAR CASO

DESPACHO DE OFICINA

CLIENTE

EXPOSICIÓN

CERTIFICADO

CÓMO COOPERACIÓN

Trade terms:	**EXW**
Payment terms:	**T/T, Western union, Paypal etc**
Delivery time:	**Normal order within 7 days, bulk order 10-15days**
Packing:	**Neutral paper box and paper carton**
Shipping:	**Express company or by sea, by air or appointed by buyer**