

Wired magnetic contact sensor

Fireproof ABS material shell

NO/NC model optional


Brown/white color optoinal

20±5(mm) gap distance

Suitable wooden door or window

14g weight

SMQT®

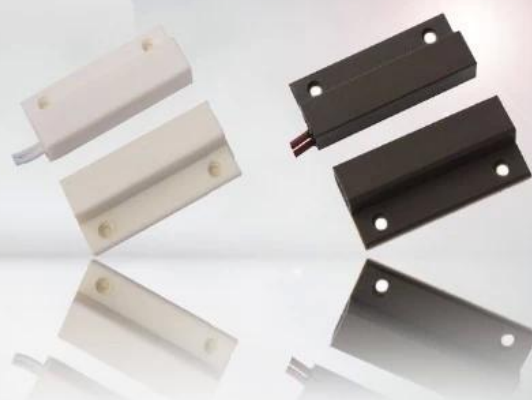

• Parameter

SMQT®

Dimensiones	41L * 34W * 6.5H (mm)
Conexión	NC / NO
Distancia de funcionamiento	20 \ pm 5 (mm)
Durabilidad máxima	≤ 100VDC
Corriente de carga	≤500mA
potencia de trabajo	≤ 10W
Material de la carcasa	ABS material ignífugo forma
color	Cafe Blanco
Alcance	Puerta o ventana no ferrosa
Peso del Producto	14g

• Introduction

SMQT®

El interruptor electrónico del sensor magnético de la puerta es el interruptor magnético del detector y el interruptor magnético del contacto de la ventana 12v para el sistema de control de acceso y el sistema de alarma.

PRODUCT PICTURE



PRODUCT FEATURE



Dimension: 34×41×6.5(mm)

NO/NC mode optional

20±5(mm) distance gap

MAX voltage ≤ 100VDC, MAX current ≤ 500mA

Fireproof ABS material shell

White/Brown color optional

Suitable for wooden door or window

14g weight

2 years quality warranty, welcome OEM



● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

