

Especificación	
Nombre del producto	Detector de movimiento con cable Pir
Modelo	EB-181
Dimensión	89 x 52,5 x 38,5 (mm)
Voltaje de funcionamiento	12V DC
Corriente de consumo	18mA 12 DC
Distancia de detección	12 m
Ángulo de detección	110 °
Salida de alarma	NO C
Modo de instalación	Montado en la pared
Altura de montaje	2,2 m
Material	Carcasa anti-incendio ABS
LED	ON / OFF (opcional)
Temperatura de trabajo	-10 °C ~ 50 °C
color de la carcasa	Blanco
Peso neto	0,096 kg




El sensor del pir del movimiento mini es el sensor del pir detector atado con alambre para el sistema de alarma.

• *Feature*


SMQT

- Control de la lógica 1. Intelligent, alarma anti falsa eficientemente
- 2. Compensación de temperatura automática
- 3. Ajuste del recuento de impulsos

4. Anti interferencia de luz blanca




- ① Wire Exit
- ② Terminal Block
- ③ Anti-dismantle Switch
- ④ Relay
- ⑤ LED Indicator
- ⑥ LED Jumper
- ⑦ Relay Jumper
- ⑧ Dual Element IR Sensor
- ⑨ Thermistor Resistance
- ⑩ Pulse Jumper
- ⑪ PCB




- +12V
- GND
- ALARM
- TAMPER
- DV ANODE
- DV CATHODE
- ALARM OUTPUT PORT
- ANTI-TEMPER OUTPUT PORT

Detecting Area View

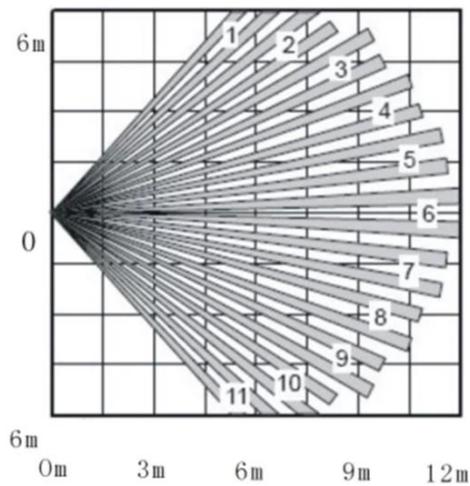

Planform

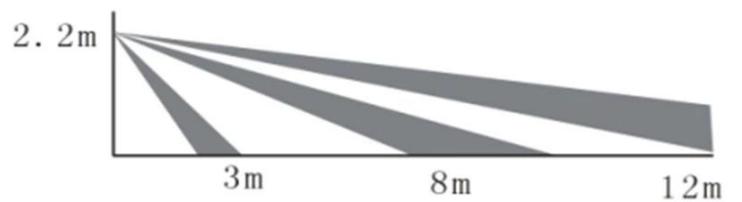

Side View

• Packaging & shipping

SMQT®



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....