

Wireless door sensor

Fireproof ABS shell

DC 12V power supply

Wireless frequency 315Mhz/433Mhz optional

Wireless signal transmission distance max 100m

SMQT®




• Parameter


SMQT®

Parámetro	
Nombre del producto	Alarma de puerta inalámbrica Sensor para la alarma casera
Modelo	EB-130
Dimensión	71 x 36 x 15 (mm) 63 x 14 x 14 (mm)
Brecha	40 ± 5 mm
Tensión de funcionamiento	Alcalina de 12V batería
Tiempo de trabajo de la batería	≤ 1 año
Inalámbrico frecuencia	315Mhz / 433Mhz (opcional)
Transmisión distancia	& Lt; = 100 m (al aire libre zona)
color de la carcasa	Blanco
Peso neto	0.035kg

• In-kind shooting

SMQT®

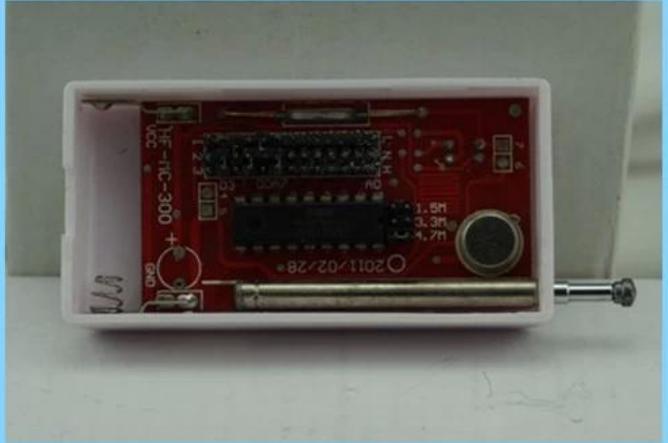


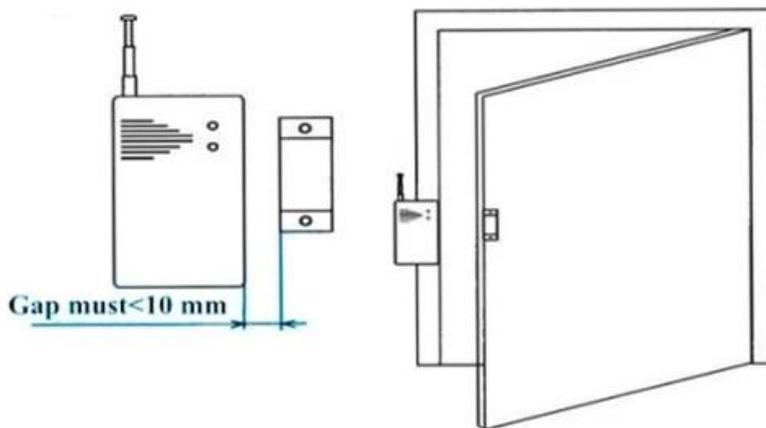

Function: To detect the door, window, drawer, ambry is illegally open or move.

Features: Triggered under the armed state, there will be alarm signal to send to alarm host.

Installation: installed at the closed door and drawer. (PS: Detectors and magnetic stripe is opposite, the spacing of less than 1 cm)



Installation Instruction

1. Emitter and magnetic stripe with two-side glue stick on the door and door frame, as far as possible between closed without gap
2. Suitable for wood door/window or glass door/window.

• Packaging & shipping

SMQT®

Lista de envases	
Nombre del producto	EB-130 Sensor inalámbrico de alarma de puerta para alarma de casa
Cantidad	200 piezas por caja
Tamaño del cartón	47 * 37 * 29 (cm)
Peso	10kg



• Office show

SMQT®



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....