

# Wired magnetic contact sensor

*NC/NO mode optional*

*20±5(mm) gap distance*


*MAX voltage≤100V DC,MAX current≤500mA*

*Suitable for wooden door or window*

*White/Brown color optional*

*12g weight*

**SMQT**

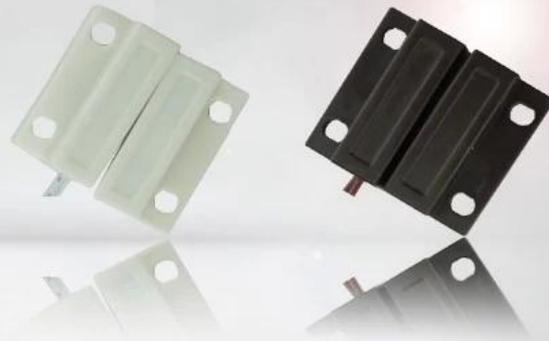

## • Parameter

**SMQT**


	<b>Especificación</b>
Nombre del producto	Sensor de contacto de puerta magnética con cable
Número de modelo	EB-134
Dimensiones	24L * 14W * 6H (mm)
Conexión	Normalmente abierto / normalmente cerrado
Distancia de funcionamiento	20 ± 5 (mm)
Presión máxima	≤ 100VDC
Corriente de carga	≤500mA
potencia de trabajo	≤ 10W
Material de la carcasa	ABS material ignífugo
Forma de color	Cafe Blanco
Alcance	Puerta o ventana no ferrosa
Peso del Producto	10 g

## • Introduction

**SMQT**

El sistema magnético de control de acceso a la puerta y la alarma de la puerta magnética es el detector magnético puerta contacto interruptor puerta senSor


# PRODUCT FEATURE

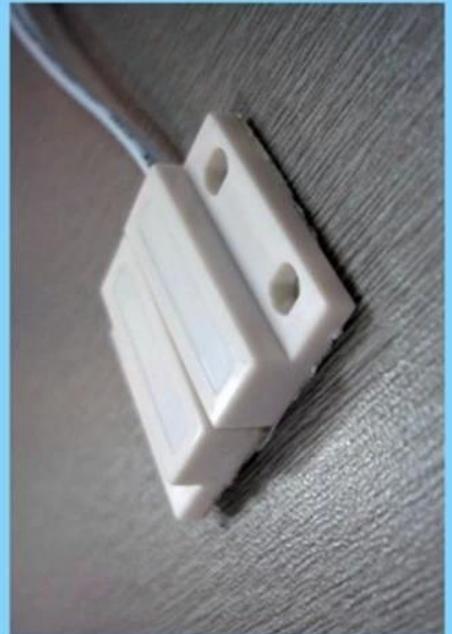

• *Feature*

SMQT

# PRODUCT FEATURE

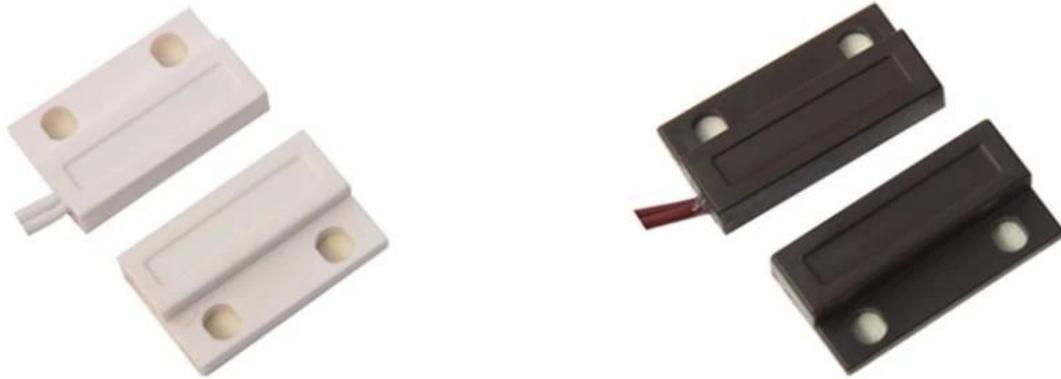

EB-134

Dimension: 24×41×6(mm)

NO/NC mode optional (default is NC mode)

20±5(mm) Gap

MAX voltage ≤ 100VDC, MAX current ≤ 500mA

Suitable for Wooden door or window

Fireproof ABS material shell

White/Brown color optional

Weight 10g

Welcome OEM, 2 years quality warranty

• *Packaging & shipping*

SMQT



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair