

## Wired infrared 2 beams perimeter detector



no intruding  
no across

### • Parameter

SMQT®

Nom du produit	Outdoor capteur de faisceau imperméable à l'eau
Numéro de modèle	ABT
Tension de fonctionnement	13,8 ~ 24VDC 11 ~ 28VAC
Courant de service	40-65mA
Vitesse d'indication	50 ~ 700m / sec
sortie anti-démolition	Caroline du Nord
Environnement température	-20 °C ~ 50 °C
Sortie d'alarme	NO / NC
Réglage du niveau	180 ° ± 90 °
réglage Vertical	± 10 °
Couleur	Noir
Matériel	résine PC

### • Introduction

SMQT®

# PRODUCT PICTURE




Le détecteur de mouvement de la barrière de faisceau infrarouge est utilisé sur

la clôture comme l'infrarouge travail de détecteur de clôture avec le système d'alarme.

## • Dimension

SMQT®

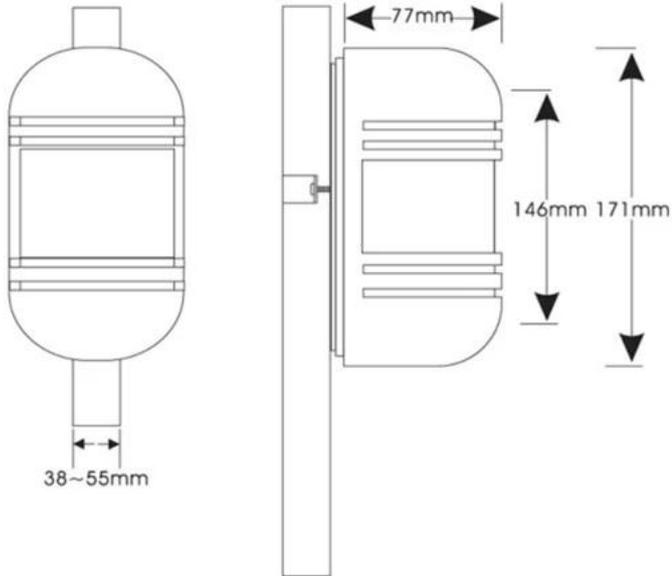

## • Feature

SMQT®

# PRODUCT FEATURE



Sealed integration structure is able to work in the harsh environment

Automatically regulate to confront with fog or inclement weather

Sensitivity (AGC circuit)

easily adjust and calibrate the horizontal/vertical optional angle

Built-in integrate optical telescopes, anti-jamming jacket

Anti-lighting circuit designed

High-power infrared receiver on the tubes, low-power digital

---

• *Packaging & shipping*

SMQT®



## ● Office show

SMQT®



## ● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....