

<b>Nom du produit:</b>	Détecteur de fumée de feu câblé 9-35v 4 pour le panneau de feu et le système d'alarme
<b>Numéro de modèle:</b>	EB-117B
<b>Source de courant:</b>	DC 9 ~ 35 V
<b>Port de fil:</b>	<b>4 ports (Puissance d'entrée +, puissance d'entrée-, Sortie relais (COM), Sortie relais (NO ou NC))</b>
<b>Taille:</b>	100 diamètre * 60 (mm)
<b>Zone de détection:</b>	<b>20 mètres carrés</b>
Indication d'alarme	Voyant rouge allumé
<b>Convient à:</b>	<b>Système de panneau d'alarme incendie</b>
<b>Manière d'installation:</b>	Plafond
<b>Température de fonctionnement:</b>	-dix Degrés Celsius ~ +50 Degrés Celsius
<b>Humidité de travail:</b>	0 ~ 90% HR (sans condensation)
<b>Poids:</b>	0,18 kg
<b>LED:</b>	2 LED lumière
<b>Matériel:</b>	Boîtier en ABS + carte PCB
<b>Couleur du boîtier:</b>	blanc
<b>OEM:</b>	Bienvenue OEM

**Quelles sont les caractéristiques de notre détecteur de fumée?**











## 4 wire detectors wiring diagram

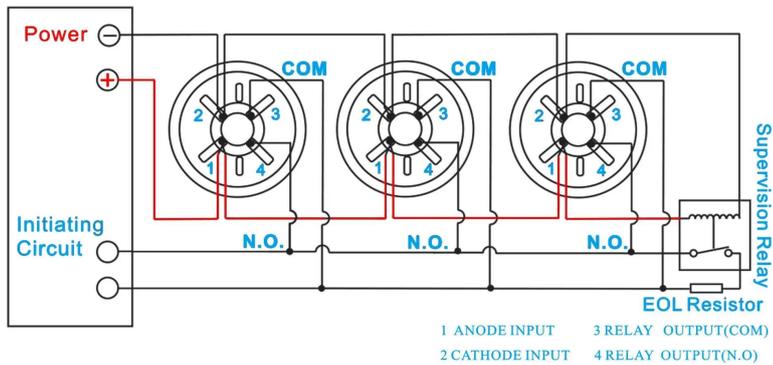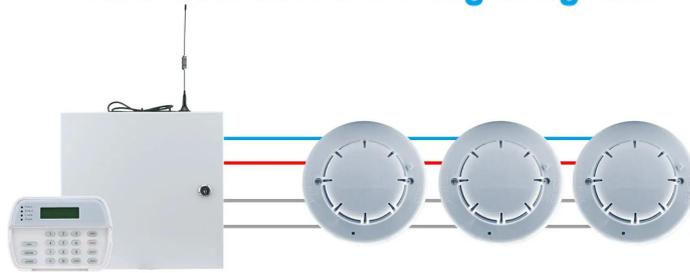

## PCB board display



## Where to installation?



Mall




Library





Bank

## **TIRAGE EN GENRE**

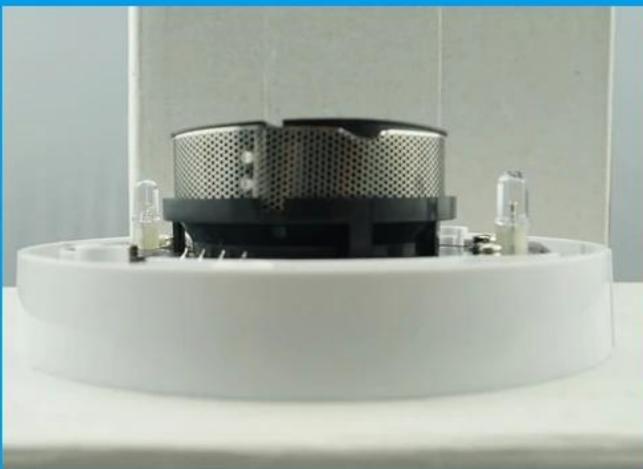

## APPLICATION

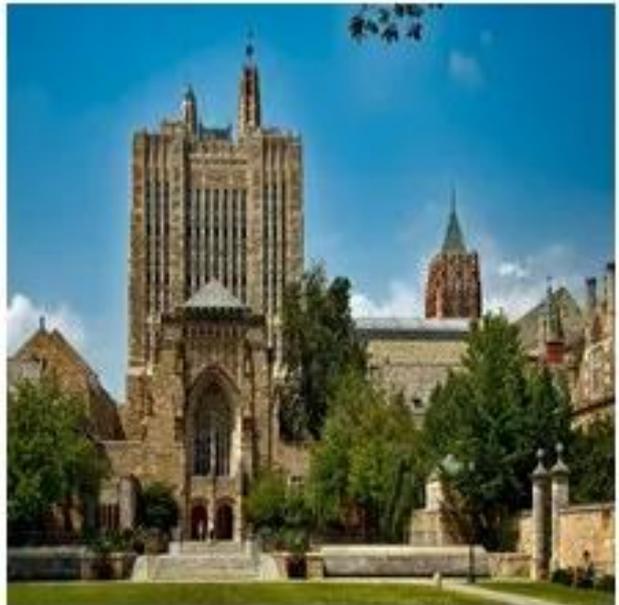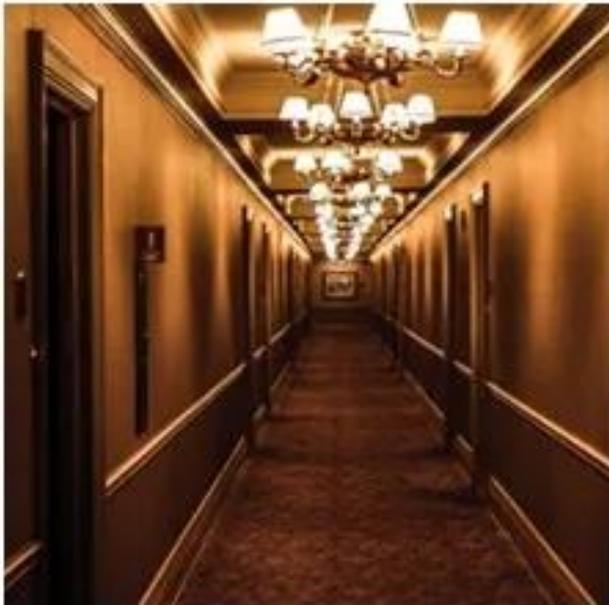

# VITRINE

**SMQT**  
铭汗科技



**SMQT**  
铭汗科技



**SMQT**  
铭汗科技



**SMQT**  
铭汗科技



**SMQT**  
铭汗科技




**SMQT**  
铭汗科技



**SMQT**  
铭汗科技



**SMQT**  
铭汗科技



**SMQT**  
铭汗科技



## SALON DU BUREAU



## CLIENT



## EXPOSITION



## CERTIFICAT



## COMMENT COOPERER



<b>Trade terms:</b>	<b>EXW</b>
<b>Payment terms:</b>	<b>T/T, Western union, Paypal etc</b>
<b>Delivery time:</b>	<b>Normal order within 7 days, bulk order 10-15days</b>
<b>Packing:</b>	<b>Neutral paper box and paper carton</b>
<b>Shipping:</b>	<b>Express company or by sea, by air or appointed by buyer</b>