

Détecteur de fumée de cigarette



Paramètre	
Prénom:	Détecteur de fumée de cigarette
Taille:	Ø106mm * 59mm
Tension de travail:	Batterie 9V 6F22
Courant de veille:	≤15uA
Courant d'alarme:	≤56mA
Durée de vie de la batterie:	Moins de 1 an
Indicateur de puissance:	Red LED
Indicateur d'alarme:	Red LED clignotement clignotant
Pression sonore:	85dB / m
Température de fonctionnement:	-10 ° C ~ 50 ° C
Humidité de travail:	≤95% HR
Distance de transmission:	& lt; 100m (aire ouverte)
Critère d'exécution:	EN14604
Zone de détection:	40 mètres carrés lorsque la hauteur de l'installation entre 6 et 12 mètres. 20 mètres carrés lorsque la hauteur d'installation à moins de 6 mètres.

Quelles sont les caractéristiques de notre détecteur de fumée de cigarette?



9V 6F22 battery, wireless output 315MHz or 433MHz

Sound & flash alarm wireless fire alarm smoke detector

Dust-proof, moth-proof and anti-Interference function

Suitable for detecting the smoke in house, shop, hotel...


2 years warranty, welcome to do OEM and ODM

Réveil en nature



APPLICATION

Standalone Gas detector

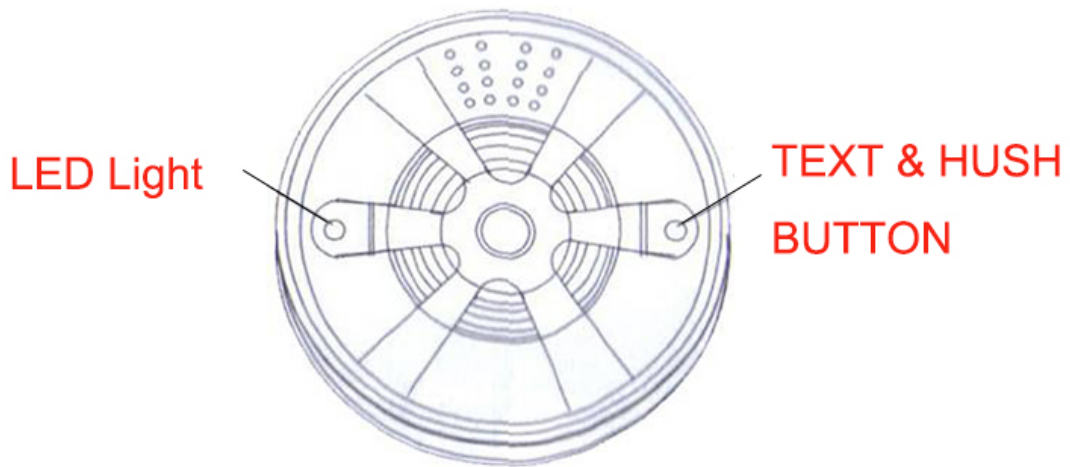

The detector adopts the reflection principle of smoke particles that can reflect infrared light. The main circuit includes a MCU processing Section, an infrared-emitting portion and an infrared receiving portion.



Detector will get into normal working state after connecting battery power, LED will flash once per every 42 seconds.

COMMENT AUTRE CHOIX?

