

## Détecteur de fumée de cigarette



Paramètre	
Prénom:	Détecteur de fumée de cigarette
Taille:	Ø106mm * 59mm
Tension de travail:	Batterie 9V 6F22
Courant de veille:	≤15uA
Courant d'alarme:	≤56mA
Durée de vie de la batterie:	Moins de 1 an
Indicateur de puissance:	Red LED
Indicateur d'alarme:	Red LED clignotement clignotant
Pression sonore:	85dB / m
Température de fonctionnement:	-10 ° C ~ 50 ° C
Humidité de travail:	≤95% HR
Distance de transmission:	& lt; 100m (aire ouverte)
Critère d'exécution:	EN14604
Zone de détection:	40 mètres carrés lorsque la hauteur de l'installation entre 6 et 12 mètres. 20 mètres carrés lorsque la hauteur d'installation à moins de 6 mètres.

**Quelles sont les caractéristiques de notre détecteur de fumée de cigarette?**



9V 6F22 battery, wireless output 315MHz or 433MHz

Sound & flash alarm wireless fire alarm smoke detector

Dust-proof, moth-proof and anti-Interference function

Suitable for detecting the smoke in house, shop, hotel...


2 years warranty, welcome to do OEM and ODM

**Réveil en nature**



## APPLICATION

# Standalone Gas detector

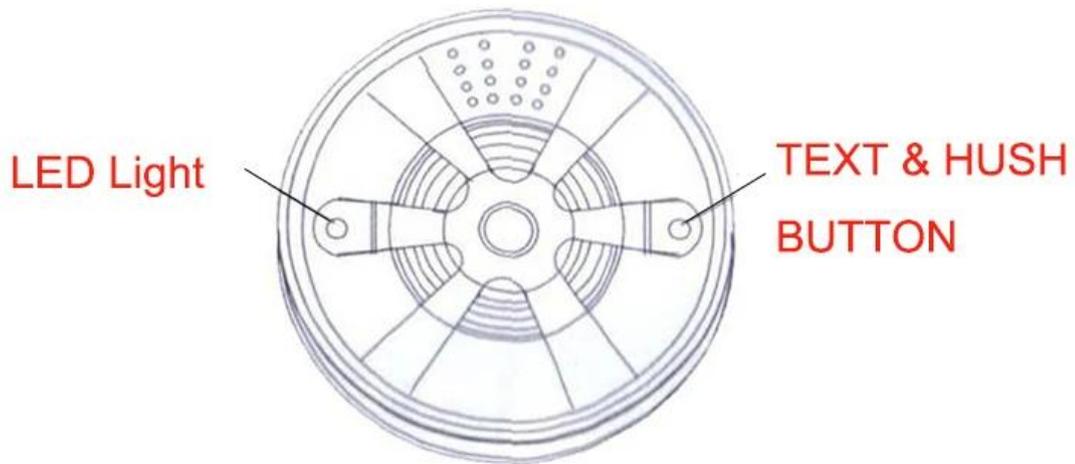

The detector adopts the reflection principle of smoke particles that can reflect infrared light. The main circuit includes a MCU processing Section, an infrared-emitting portion and an infrared receiving portion.



Detector will get into normal working state after connecting battery power, LED will flash once per every 42 seconds.

## COMMENT AUTRE CHOIX?

