

• *Parameter*

SMQT

Numéro de produit	EA-22A	EA-22B
Structure standard	Panneaux en aluminium, boutons métalliques	Panneaux en aluminium, boutons métalliques
Performances électriques	Durabilité maximale actuelle 3A36VDC	Durabilité maximale actuelle 3A36VDC
Essai de durabilité	500 000 fois le vieillissement testé	500 000 fois le vieillissement testé
Pour Type	Cadres creux et boîte électrique immergée	Cadres creux et boîte électrique immergée
Température	-10 ~ + 55 °C	-10 ~ + 55 °C
Humidité applicable	0 à 95% (humidité relative)	0 à 95% (humidité relative)
Traitement des panneaux	Panneaux d'aluminium sablés	Panneaux en aluminium sablés

• *Introduction*

SMQT



Bouton de déverrouillage de porte avec le bouton de sortie de

poussée de métal et d'acier inoxydable de matériel pour le système de contrôle d'accès.

• *Feature*

SMQT



EA-22A



EA-22B



EA-22A



EA-22B

Advantages

Aluminum panel with the sand blast treatment

Pure copper plating nickel button


500,000 times mechanical test

• *Installation*

SMQT



Switch power supply

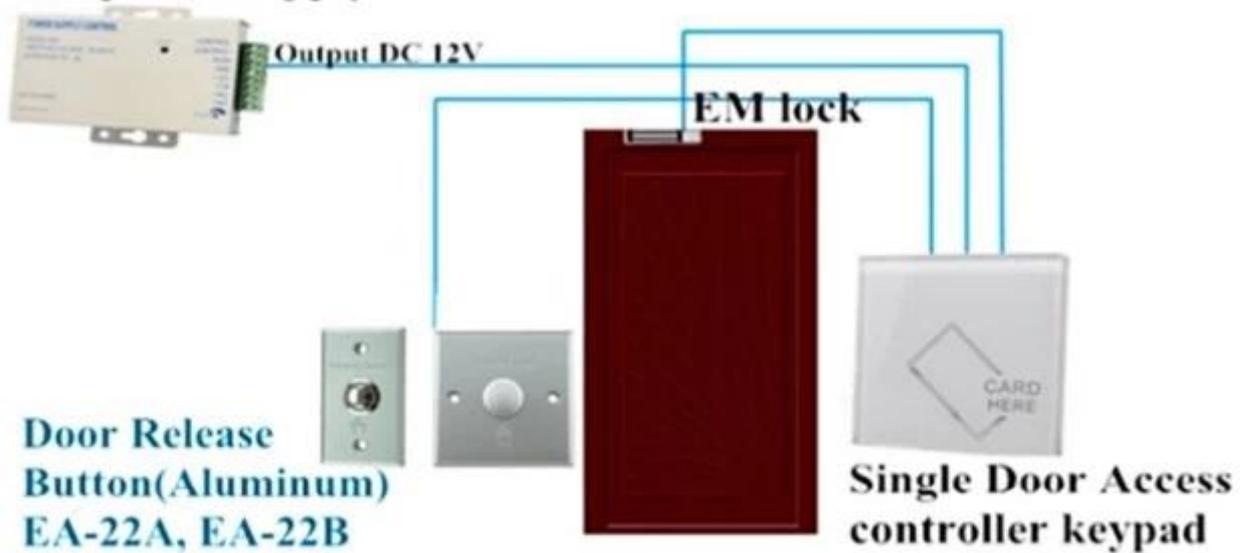

•Dimension



• Packaging & shipping

SMQT®





● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair