

Nom du produit	Interrupteur de porte à induction infrarouge
Modèle	EA-21A / EA-21B
Dimension	EA-21A: 85 x 52 x 25 (mm) EA-21B: 86 x 86 x 39 (mm)
Tension d'entrée	DC 12V
Angle d'induction	& Lt; 115 °
Capacité de puissance	& Lt; 4W
Distance d'induction	10 ~ 20 cm
Sortie contact	NO / NC / COM
Test mécanique	500.000 fois test
Plage appropriée	Système de contrôle d'accès
Couleur	gris noir
Usage	Système de contrôle d'accès et système de portier
Humidité relative	0 ~ 95%
Environnement température	-20 °C -50 °C
Poids net	EA-21A: 0,046 kg EA-21B: 0,106 kg



Bouton de sortie de contrôle d'accès inclus Bouton-poussoir,

bouton poussoir, bouton de porte infrarouge utilisé pour sortir et entrer.

• *Feature*

SMQT



EA-21A



EA-21B



No touch infrared induction door release button

500000 times mechanical test


LED back light indication

Stainless steel panel,wire drawing finished

Welcome OEM&ODM

• Installation

SMQT®

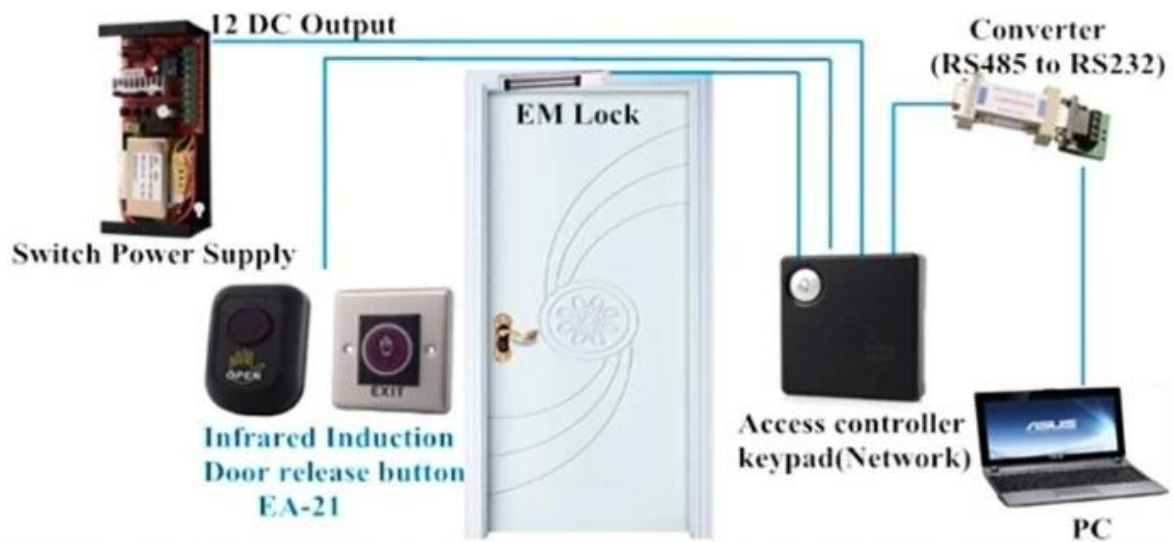

• Packaging & shipping

SMQT®



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair