

Wired magnetic door sensor

Fireproof ABS material housing

20±5(mm) gap

Max voltage≤100V DC,Max current≤500mA

Use for wooden door or window

White/Black color optional

SMQT®



• Parameter

SMQT®





Dimensions	64L * 19W * 13H (mm)
Connexion	Normalement ouvert / normalement fermé
Distance de fonctionnement	20 ± 5 (mm)
Pression maximale	≤100VDC
Courant de charge	≤500mA
Puissance de travail	≤ 10W
Matériau du boîtier	ABS matériau ignifuge forme
Couleur	Marron / Blanc
Portée	Porte ou fenêtre non ferreuse
Poids du produit	24 g

• Introduction

SMQT®

Le contact magnétique de contact de porte est le capteur de porte filaire et le capteur de fenêtre pour le contrôle d'accès de porte et le système d'alarme.

PRODUCT PICTURE

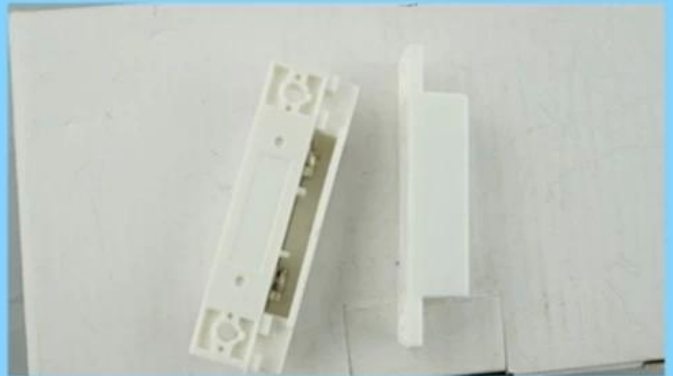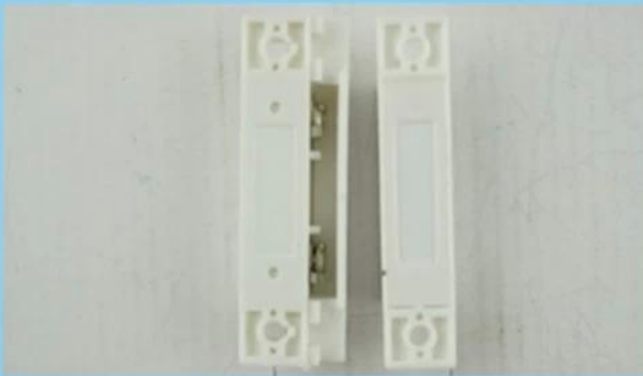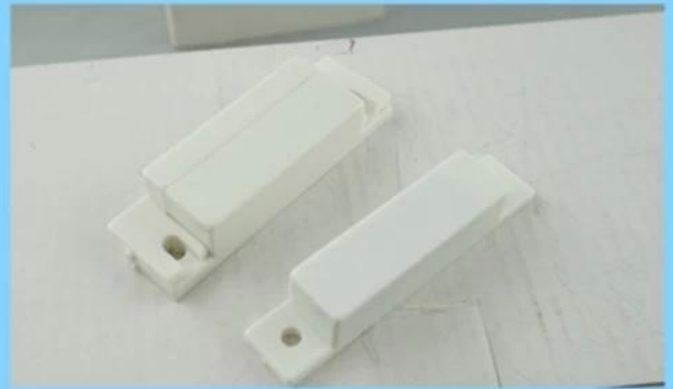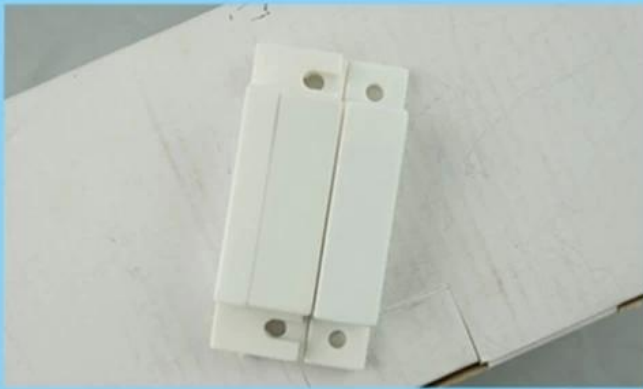

PRODUCT FEATURE



White



Brown

2 Color optional

Dimension: 64×19×13(mm)

NO/NC mode optional

20±5(mm) gap

MAX voltage ≤ 110VDC, MAX current ≤ 500mA

Fireproof ABS material housing

Suitable for wooden door or window

Brown/ White color optional

Weight: 24g

2 years quality warranty, welcome OEM



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

