

Wired magnetic contact sensor

Fireproof ABS material shell

NO/NC model optional


Brown/white color optional

20±5(mm) gap distance

Suitable wooden door or window

14g weight

SMQT

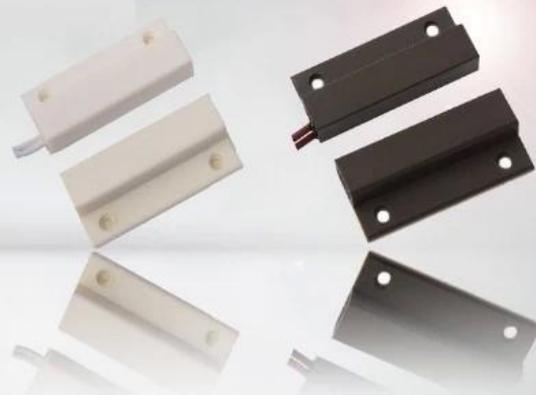

• Parameter

SMQT

Dimensions	41L * 27W * 8 (mm)
Connexion	Normalement ouvert / normalement fermé
Distance de fonctionnement	20 ± 5 (mm)
Pression maximale	≤100VDC
Courant de charge	≤500mA
Puissance de travail	≤ 10W
Matériau du boîtier	ABS matériau ignifuge
Couleur de la forme	Marron / Blanc
Portée	Porte ou fenêtre non ferreuse
Poids du produit	12g

• Introduction

SMQT

Le détecteur de contact magnétique de porte est le capteur de mouvement de porte pour le dispositif d'alarme de capteur de proximité de porte ouverte.

PRODUCT PICTURE



PRODUCT FEATURE



EB-132

Dimension: 34×41×6.5(mm)

NO/NC mode optional

20±5(mm) distance gap

MAX voltage ≤ 100VDC, MAX current ≤ 500mA

Fireproof ABS material shell

White/Brown color optional

Suitable for wooden door or window

14g weight

2 years quality warranty, welcome OEM



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair