




spécification	
Nom du produit:	Détecteur de fumée autonome, détecteur de fumée sans fil, fumée d'alarme
Taille:	Ø106mm * 59mm
Tension de travail:	Batterie 9V 6F22
Courant de veille:	≤15uA
Courant d'alarme:	≤56mA
Vie de travail de batterie:	Moins de 1 an
Indicateur de puissance:	RLED ed
Indicateur d'alarme:	Rflash LED clignotant
Pression sonore:	85dB / m
Température de fonctionnement:	-10 ° C ~ 50 ° C
Humidité de travail:	≤95% HR
Distance de transmission:	& lt; 100m (aire ouverte)
Execute critère:	EN14604
Zone de détection:	40 mètres carrés lorsque la hauteur d'installation entre 6 et 12 mètres. 20 mètres carrés lorsque la hauteur d'installation à moins de 6 mètres.

Quelles sont les caractéristiques de notre détecteur de fumée?

Standalone Gas detector

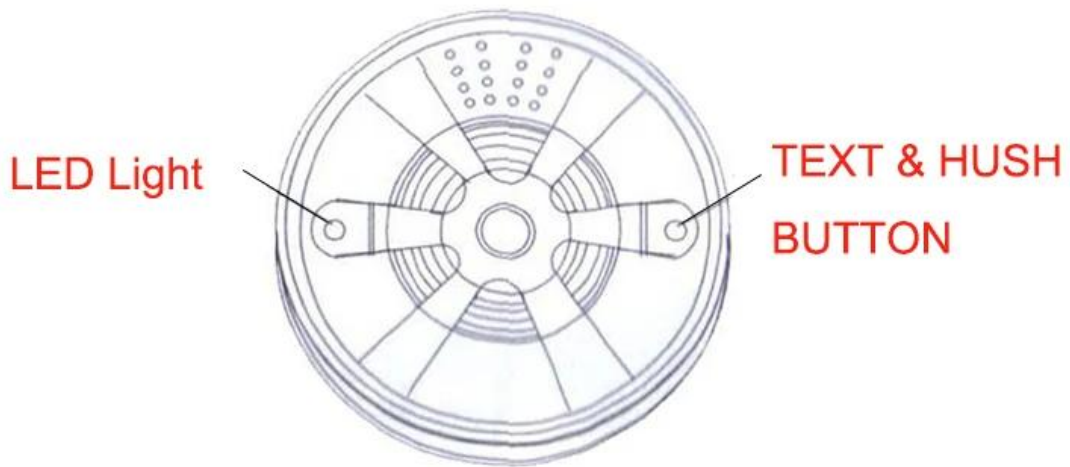

The detector adopts the reflection principle of smoke particles that can reflect infrared light. The main circuit includes a MCU processing Section, an infrared-emitting portion and an infrared receiving portion.



Detector will get into normal working state after connecting battery power, LED will flash once per every 42 seconds.

TIRAGE EN GENRE



VITRINE



SALON DU BUREAU



CLIENT



EXPOSITION



Trade terms:	EXW
Payment terms:	T/T, Western union, Paypal etc
Delivery time:	Normal order within 7 days, bulk order 10-15days
Packing:	Neutral paper box and paper carton
Shipping:	Express company or by sea, by air or appointed by buyer