## • Parameter

SMQT

| | |
|---|---|
| Nom du produit | Convertisseur TCP / IP vers RS485 / RS422 |
| Modèle | EA-06 |
| Dimension | 92L * 63W * 23H (mm) |
| Alimentation externe | DC4.5V ~ 5.5V |
| Protocole série | TCP / UDP / IP / ICMP, Ethernet, ARP |
| Interface de communication | Ethernet (10Base-T), RS232 / 485 avec commutateur de terminal |
| Indication du signal | Trois feux de signalisation TXD RXD POWER |
| Support de transmission | Fil de paire torsadée blindée |
| Taux de transmission | 300bps ~ 115200bps |
| Isolement | 3500VRMS |
| Couleur | gris |
| Usage | Transmission de données |
| Humidité relative | 5% ~ 95% |
| Environnement temprature | 0 ℃ ~ 50 ℃ |

## • Introduction

SMQT

Le convertisseur série-Ethernet est RS485 / RS422 à convertisseur TCP / IP pour le système de contrôle d'accès de porte.

## •Feature

SMQT

# EA-06

***Converter RS232/485 to TCP/IP***

***Dimension:96×63×23(mm)***

***Transmission speed:300bps-115200bps***

***Format:TCP/UDP/IP/ICMP/Etjernet/ARP***

***Interface:Ethernet(10Base-T),RS232/485***

***with 6 wiring terminals***

***Welcome OEM and 2 years quality warranty***

## •Installation

SMQT

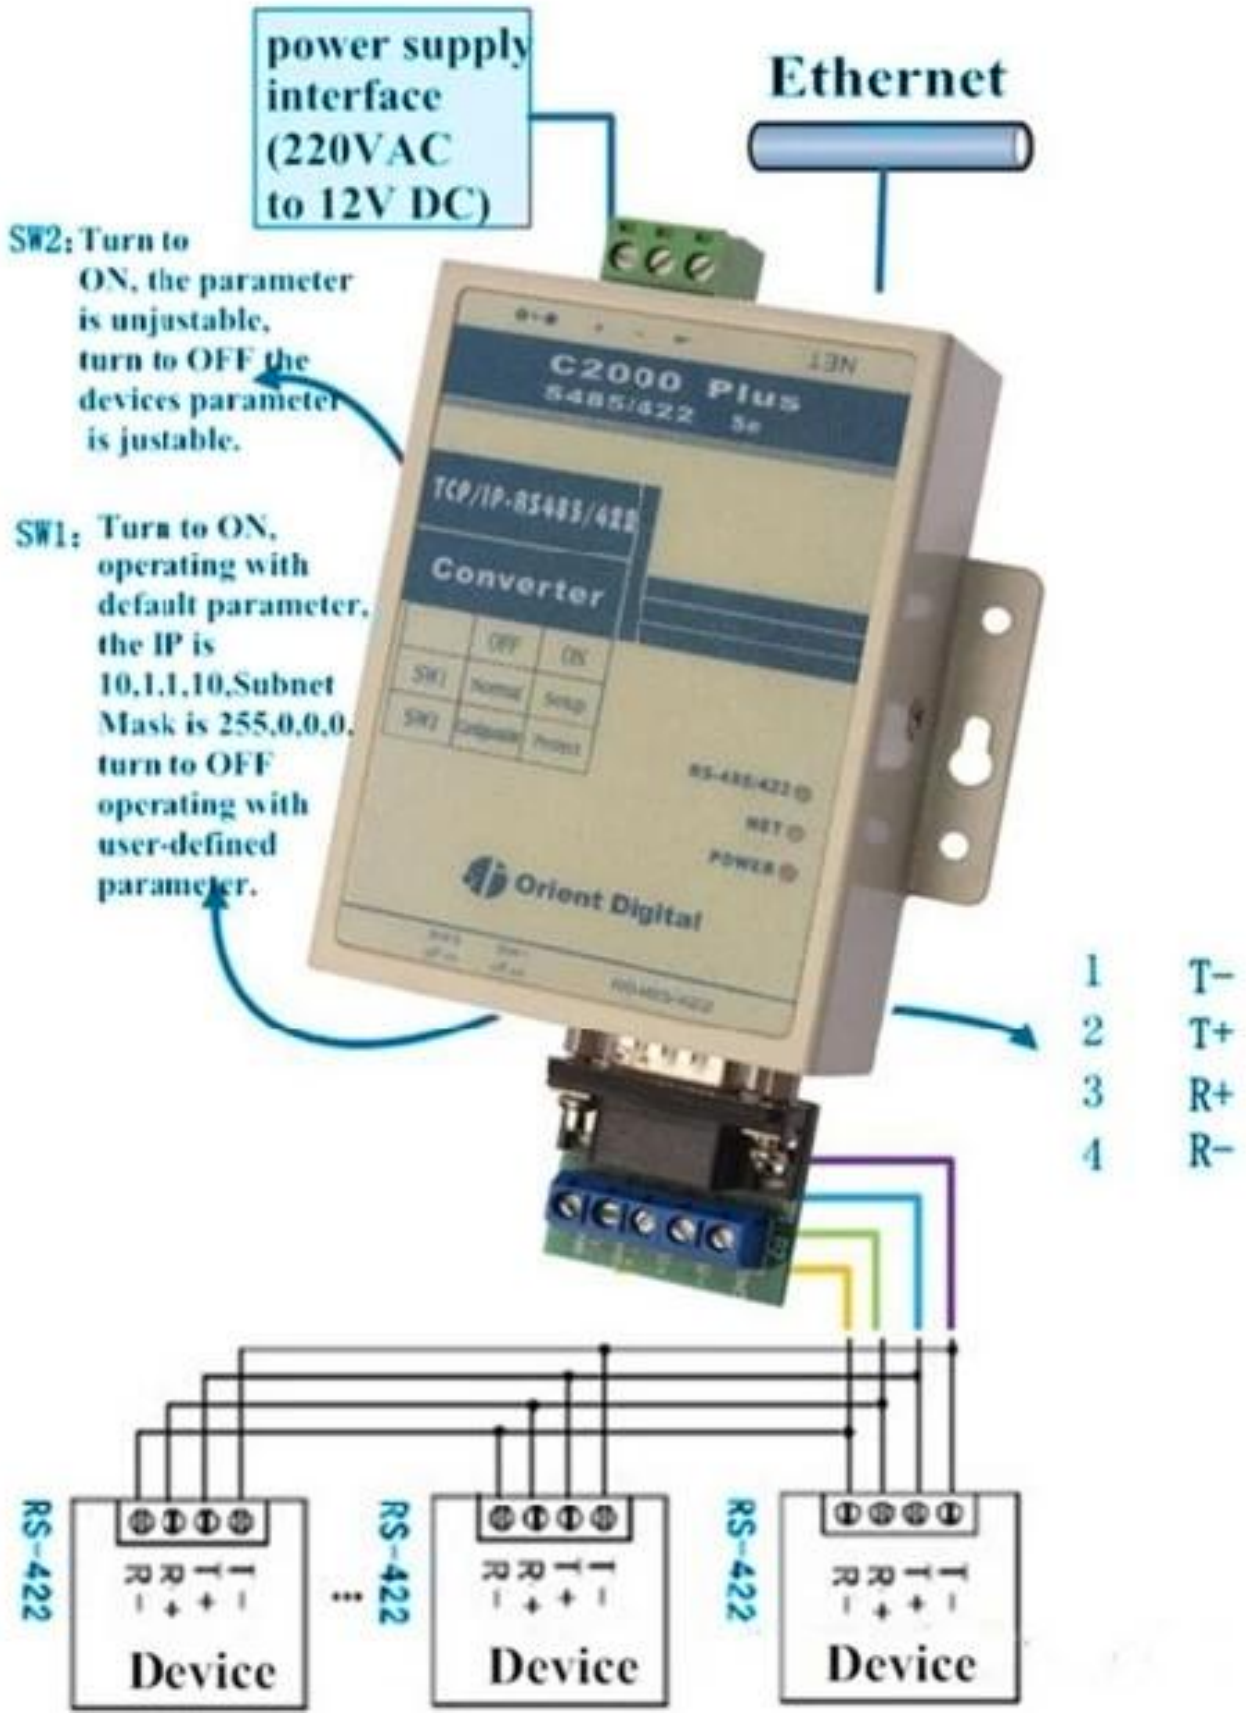


## •*Packaging & shipping*

## • *Office show*

SMQT

## • *Exhibition*

SMQT

2011 Brazil Fair
2012 Shenyang Fair
2013 Jinan Fair
2013 Shenzhen Fair
共赢
.....
2012 Shenyang Fair
2013 Shenyang Fair
2013 Shenzhen Fair
2015 Shenzhen Fair