

## • *Parameter*

**SMQT**

Dimensions	224L * 224W * 83H (mm)
La tension de sortie	DC12V
Courant de sortie	5A
Puissance de sortie	60W
Réglage du délai	0 ~ 10s
Spécialement conçu	Verre à double paroi, transformateur en cuivre, coquille en acier
fonction de sécurité	Protection contre les courts-circuits, protection contre les décharges
Portée	Contrôle d'accès, système intercom de bâtiment
Peut être accédé par batterie de secours	12V 7AH

## • *Introduction*

**SMQT**



L'alimentation ininterrompue imperméable (ups) est variable 12v  
fourniture d'alimentation en porcelaine et utilisé avec le système de  
contrôle des accès de porte et système d'alarme.

## • Dimension

SMQT



## • Feature

SMQT



*Access control switch power supply*

*AC 220V input, DC 12V 5A output*

*0~10s time relay (adjustable)*

*Short circuit protection, charge protection*

*Double face PC board, pure copper*

*transformer, steel shell*


*Suitable for access control and*

*doorphone system*

*12v 7Ah backup battery optional*

*Welcome OEM and order sample test*

*2 years quality warranty*

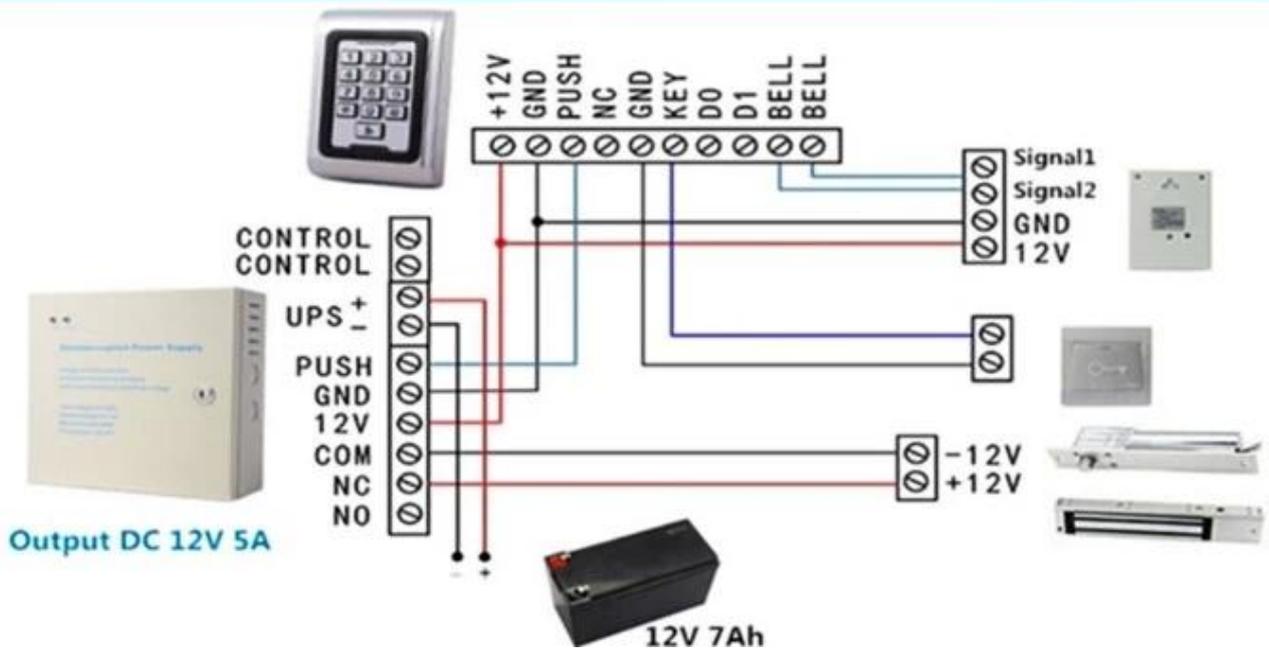

• *Packaging & shipping*



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....

## How to cooperation

SMQT



<b>Trade terms:</b>	<b>EXW</b>
<b>Payment terms:</b>	<b>T/T, Western union, Paypal etc</b>
<b>Delivery time:</b>	<b>Normal order within 7 days, bulk order 10-15days</b>
<b>Packing:</b>	<b>Neutral paper box and paper carton</b>
<b>Shipping:</b>	<b>Express company or by sea, by air or appointed by buyer</b>