

	spécification
Nom du produit	Détecteur de mouvement filaire Pir
Modèle	EB-181
Dimension	89 x 52,5 x 38,5 (mm)
Tension de fonctionnement	12V DC
Courant de consommation	18mA 12 DC
Distance de détection	12m
Angle de détection	110 °
Sortie d'alarme	NO / NC
Mode d'installation	Mural
Hauteur d'installation	2,2 m
Matériel	Boîtier anti-feu ABS
LED	ON / OFF (en option)
Température de fonctionnement	-10 °C ~ 50 °C
Couleur de la coque	blanc
Poids net	0,096 kg





Mini capteur de mouvement pir est le détecteur pir détecteur filaire pour le système d'alarme.

• *Feature*


SMQT

1. Intelligent contrôle logique, anti fausse alarme efficacement
2. Compensation de température automatique
3. Réglage du compteur

4. Anti interférence lumière blanche

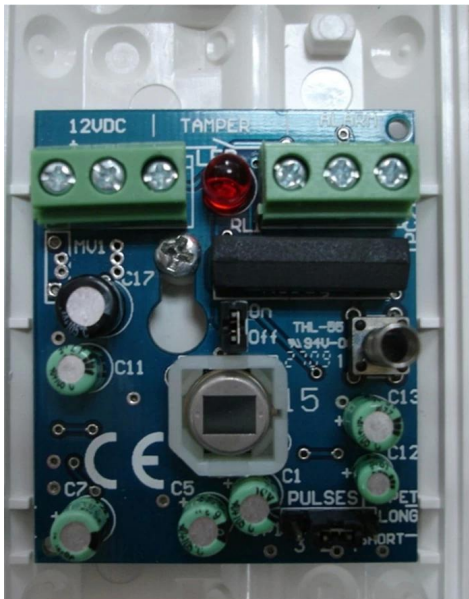


- ① Wire Exit
- ② Terminal Block
- ③ Anti-dismantle Switch
- ④ Relay
- ⑤ LED Indicator
- ⑥ LED Jumper
- ⑦ Relay Jumper
- ⑧ Dual Element IR Sensor
- ⑨ Thermistor Resistance
- ⑩ Pulse Jumper
- ⑪ PCB




- +12V
- GND
- ALARM
- TAMPER
- DV ANODE
- DV CATHODE
- ALARM OUTPUT PORT
- ANTI-TEMPER OUTPUT PORT

Detecting Area View

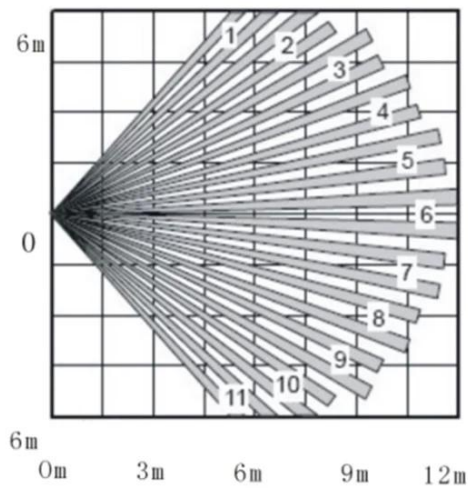

Planform

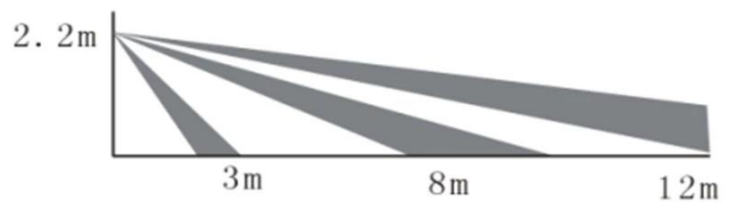

Side View

• Packaging & shipping

SMQT®



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....