

Wireless door sensor

Fireproof ABS shell

DC 12V power supply

Wireless frequency 315Mhz/433Mhz optional

Wireless signal transmission distance max 100m

SMQT



• *Parameter*

SMQT



spécification	
Nom du produit	Capteur de porte magnétique sans fil
Numéro de modèle	EB-130
Tension de fonctionnement	12V
Distance de fonctionnement	40 ± 5 (mm)
Fréquence de transmission	315MHZ / 433MHZ
Distance de transmission	≤100m

• *Introduction*


SMQT

Le capteur sans contact de porte est le commutateur de capteur magnétique 12v et le capteur d'alarme de rideau sans fil pour le système d'alarme.

PRODUCT PICTURE

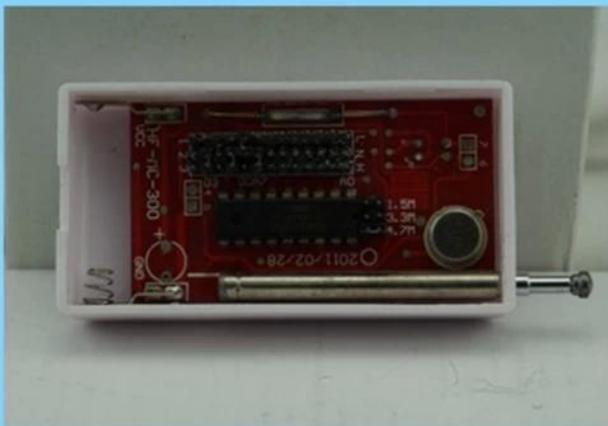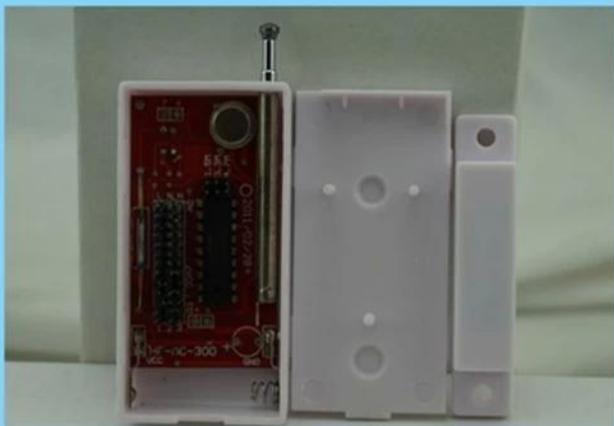


PRODUCT FEATURE

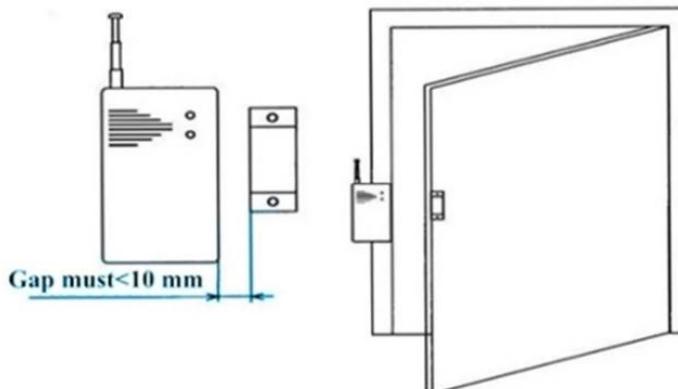

Function: To detect the door, window, drawer, ambry is illegally open or move.

Features: Triggered under the armed state, there will be alarm signal to send to alarm host.

Installation: installed at the closed door and drawer. (PS: Detectors and magnetic stripe is opposite, the spacing of less than 1 cm)



Installation Instruction

1. Emitter and magnetic stripe with two-side glue stick on the door and door frame, as far as possible between closed without gap
2. Suitable for wood door/window or glass door/window.

• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....