



• Parameter

SMQT®

| | |
|---------------------------|----------------------------------|
| Il numero di raggi | 2/4/6/8/10 |
| Distanza (indoor) | 5m / 10m / 20m / 30m / 40m / 60m |
| rivelatore altezza | 37/72/125/167 / 209 centimetri |
| corrente di funzionamento | 30mA ~ 80mA |
| Tensione di funzionamento | DC12V ~ DC18V |
| feedback in tempo | & Lt; 1.5ass |
| Contatto relè | 3A, AC120V / DC24V |
| Regolare l'angolo | 180° ± 90° |
| Temperatura ambiente | -35 °C ~ 55 °C |

• Introduction

SMQT®



Il rilevatore di movimento fascio tenda a infrarossi doppio viene utilizzato con finestra, porta con il sistema di allarme.

Il sensore del fascio come il lavoro sensore recinzione laser.

With tamper resistant, anti interference, high reliability

With anti demolition, anti interference function, when there is an intruder to remove or damage, the immediate alarm model, the



Tamper switch, when the invaders destroyed or disassembled, tamper switch will trigger the alarm immediately bounce.



Waterproof moisture-proof function, can adapt to bad weather

Because this product is used in indoor and outdoor, the use of universal is relatively strong. The products according to the scientific design, with rain proof structure for installation of indoor and outdoor machine of supermarket zone, waterproof, dust-proof, wind and rain, wind and rain does not matter, can adapt to all kinds of bad environment and weather.



Aluminum alloy material design: beautiful and reliable structure

Main body outer shell is made of high quality aluminum alloy material, and the surface of the polishing treatment, bones and durable; the import filter to visible light good filtering function.



Installation and debugging is convenient, 3 when the warning distance can be adjusted

After the installation of the fixed infrared beam of the launch and reception of vision can be achieved 360 degrees of rotation, three block adjustable warning distance, convenient and sensitive.



far (15-30m)
in (5-15m)
near (0-5m)

3 warning distance adjustable map

The bracket adopts the latest sliding cover to be designed, and the installation is more convenient. Disassembly more secure.

Two Beams



Four Beams



Six Beams




Eight Beams



Ten Beams





Infrared Barrier

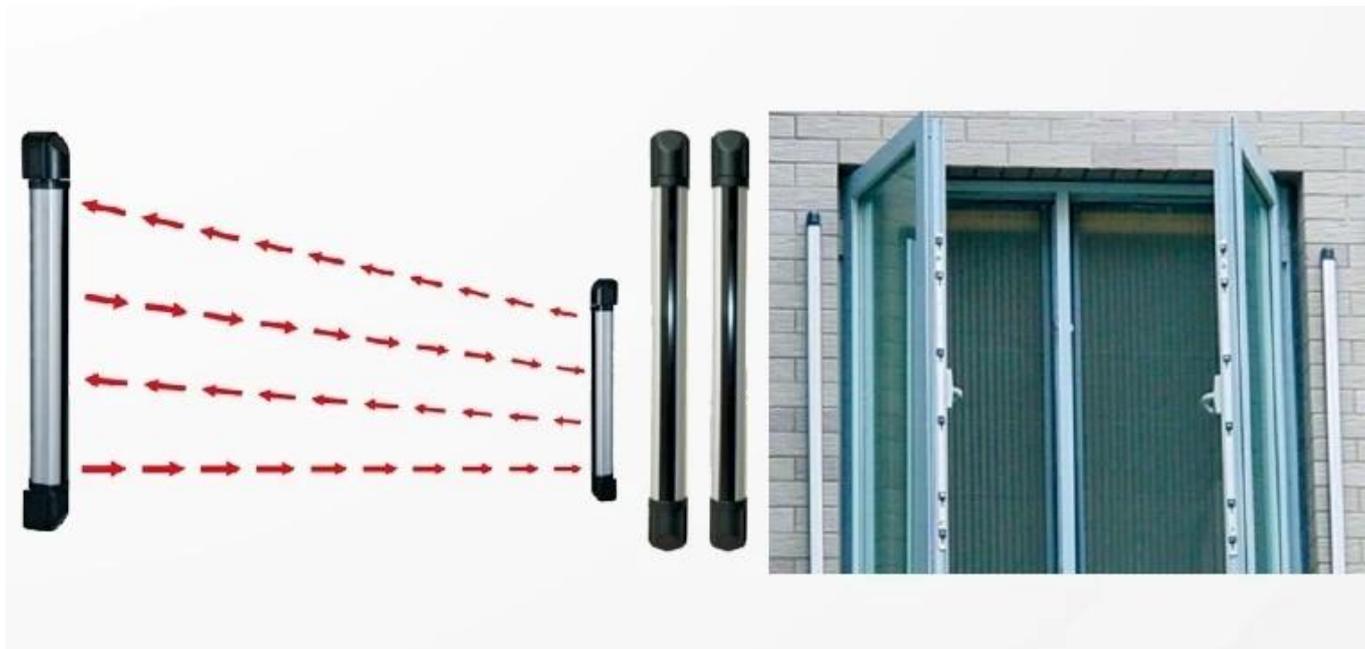

• *Feature*

SMQT

recinzioni infrarossi (chiamati anche "ringhiere infrarossi") è una sorta di tiro a infrarossi attivi, utilizzando multi-beam luce infrarossa del trasmettitore radio al ricevitore a "trasmettitore a bassa frequenza, Time Division Detection" modalità emette luce a infrarossi, una volta che la persona o l'oggetto che blocca qualsiasi fasci di luce adiacenti a due o più emessi da il trasmettitore supera 30ms, il segnale di allarme uscita del ricevitore immediatamente quando ci sono piccoli animali o piccole oggetti di distanza da dove un raggio di sole, l'allarme non sarà segnale di allarme in uscita.

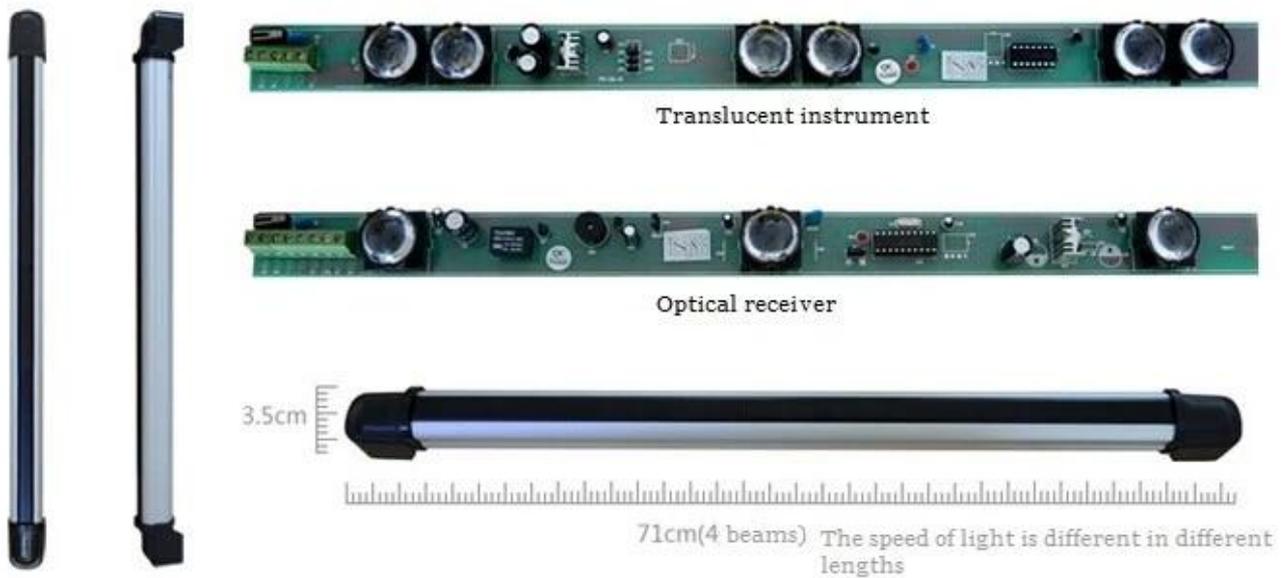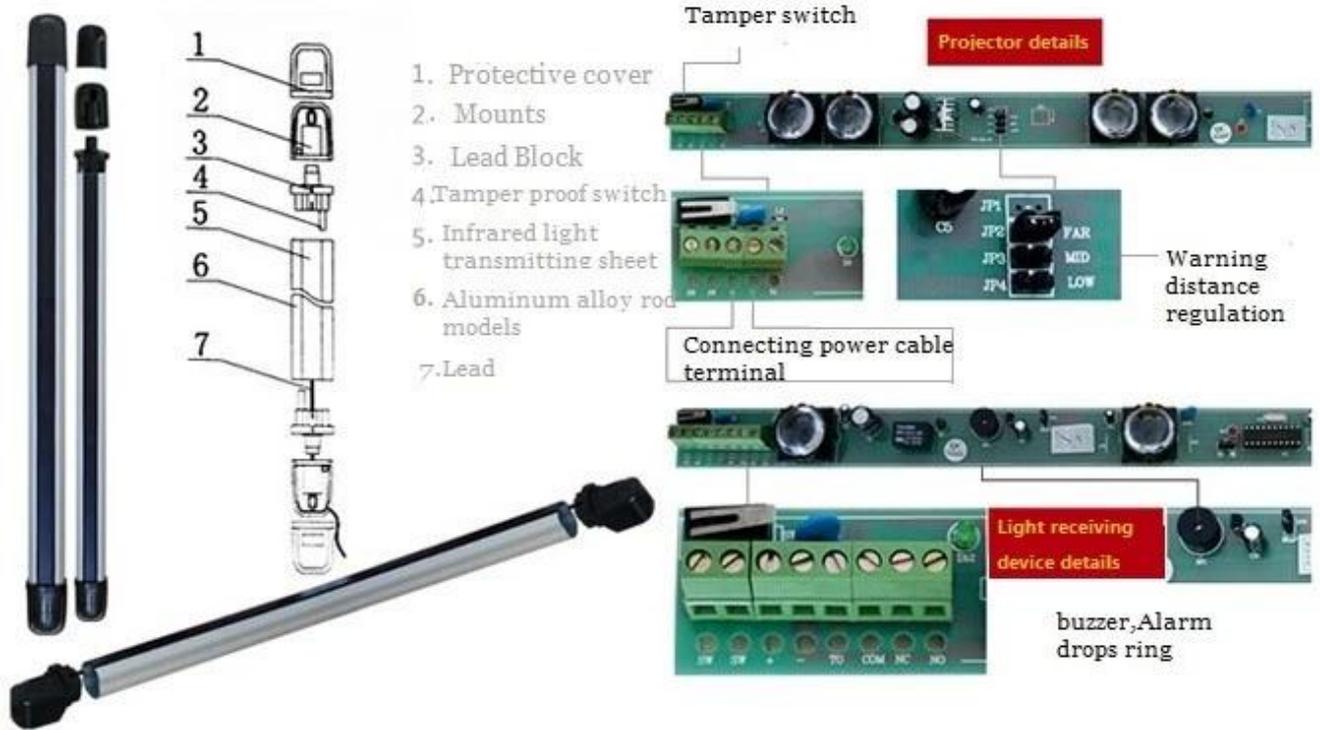

• *Packaging & shipping*



Wireless infrared beam sensor

Mounting screw

User manual

Packaged box



• Office show

SMQT®



● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....