

Il numero di raggi	2/4/6/8/10
Distanza (interna)	5m / 10m / 20m / 30m / 40m / 60m
Rilevatore di altezza	37/72/125/167 / 209cm
Corrente di lavoro	30mA ~ 80mA
Tensione operativa	DC12V ~ DC18V
Tempo di feedback	<1.5ass
Contatto relè	3A, AC120V / DC24V
Regola l'angolazione	180° ± 90°
Temperatura ambiente	-35 °C ~ 55 °C

Emissione infrarossa a bassa frequenza: elettrodomestici (sistema di controllo remoto) nessuna interferenza;

Rilevamento intelligente dell'intensità della luce: riduzione del consumo energetico, riduzione dei falsi positivi;

Una varietà di installazioni: lattina per montaggio su superficie e ad incasso, senza allineamento preciso;

Scatto a infrarossi incrociati: evita completamente l'interferenza della luce solare (tecnologia unica);

aspetto elegante: la ricerca della combinazione perfetta di moderna decorazione domestica.


Tuta del sensore barriera fotoelettrica a raggi infrarossi da utilizzare con l'allarme finestra e recinzione.

Le recinzioni a infrarossi (chiamate anche "ringhiere a infrarossi") sono una specie di tiro a infrarossi attivi, che utilizza la luce a infrarossi a più raggi sul trasmettitore radio per il ricevitore alla modalità "Trasmettitore a bassa frequenza, rilevazione della divisione del tempo" emette luce a infrarossi, una volta che la persona o l'oggetto che blocca due o più fasci di luce adiacenti emessi dal trasmettitore supera i 30 ms, il ricevitore emette immediatamente il segnale di allarme quando ci sono piccoli animali o piccoli oggetti lontano da dove un raggio di sole, l'allarme non emetterà un segnale di allarme.



● Dimesion Picture

SMOT

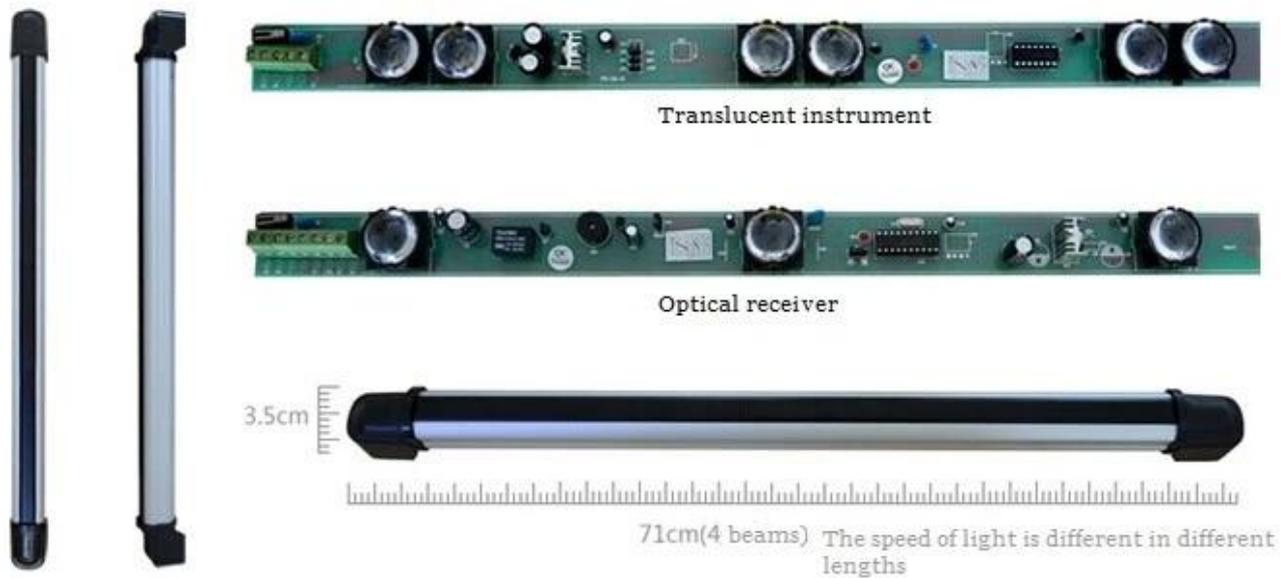

● Installations

SMOT



Using CPU micro processing intelligent control, intelligent distinction through the size of the object, there is an illegal intruder when the fence to trigger an alarm. When the smaller cats, dogs, birds and other small animals through the fence , the detector will not trigger the alarm, does not affect people's trouble to switch windows.





## ● Features

**SMOT**

**With tamper resistant, anti interference, high reliability**

With anti demolition, anti interference function, when there is an intruder to remove or damage, the immediate alarm model, the



Tamper switch, when the invaders destroyed or disassembled, tamper switch will trigger the alarm immediately bounce.



**Waterproof moisture-proof function, can adapt to bad weather**

Because this product is used in indoor and outdoor, the use of universal is relatively strong. The products according to the scientific design, with rain proof structure for installation of indoor and outdoor machine of supermarket zone, waterproof, dust-proof, wind and rain, wind and rain does not matter, can adapt to all kinds of bad environment and weather.




**Aluminum alloy material design: beautiful and reliable structure**

Main body outer shell is made of high quality aluminum alloy material, and the surface of the polishing treatment, bones and durable; the import filter to visible light good filtering function.



**Installation and debugging is convenient, 3 when the warning distance can be adjusted**

After the installation of the fixed infrared beam of the launch and reception of vision can be achieved 360 degrees of rotation, three block adjustable warning distance, convenient and sensitive.

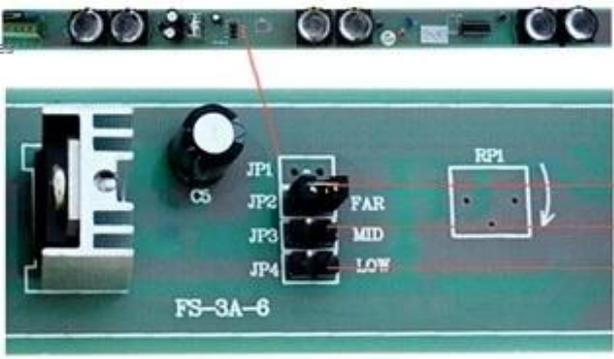

far ( 15-30m )  
in ( 5-15m )  
near( 0-5m )

3 warning distance adjustable map

The bracket adopts the latest sliding cover to be designed, and the installation is more convenient. Disassembly more secure.

**● Packing list**



Wireless infrared beam sensor

Mounting screw

User manual

Packaged box

● Office

SMQT



● Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....