


specificazione	
Nome del prodotto	Sensore porta magnetico senza fili
Modello di prodotto	EB-130A
Alimentazione elettrica	Batteria 23A, 12V
Corrente di riposo	≤10UA
Corrente di allarme	≤25mA
ambiente di lavoro	Temperatura di 10 °C ~ 50 °C Umidità relativa ≤97%
Distanza di trasmissione	Spazio all'aperto 100 m
Dimensioni	65 * 38 * 20 (mm)
Posizione di installazione	Porte, finestre
Materiale delle coperture	addominali

- 1, progettazione del circuito a chip singolo, elaborazione intelligente, stabile e affidabile.
- 2, con funzione di rilevamento a bassa tensione.
- 3, il trasmettitore wireless a radiofrequenza che supporta l'uso del pannello di controllo.
- 4, design compatto, bell'aspetto, facile installazione.
- 5, monitorare e controllare tutti i tipi di porte e finestre e spegnere.



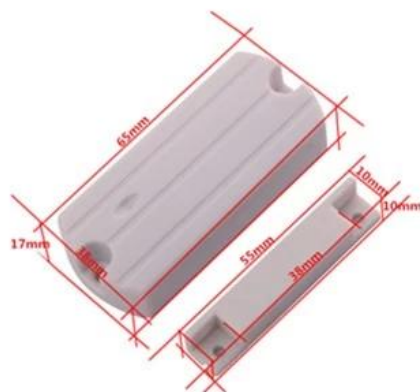

## ● Installations

**SMQT**



### ▲ *Installation*

Selected installation area outdoor or window, then fixtured it with screws.

Note: The gap must < 45mm.

The working environment should be dry and clean.

## ● Packing list

**SMQT**

<b>Elenco di imballaggio</b>	
Nome del prodotto	Sensore porta magnetico senza fili
Quantità	200 pezzi / scatola
Formato della scatola	40 * 30 * 20 (cm)
Peso	10Kg



● Office

SMQT®



● Exhibitions

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....