

Wired embedded magnetic contact

NC/NO mode optional

35±5(mm) gap distance


Max voltage ≤100VDC, Max current ≤500mA

Suitable for metal door or window

White/Brown color optional

24g weight

SMQT®

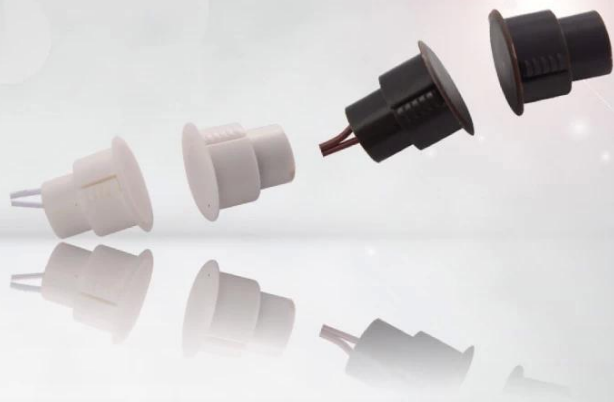

• Parameter

SMQT®

Parametro	
Nome del prodotto	sensore di contatto magnetico Emedded
Modello	EB-136
Dimensione	Φ19 × 25 (mm)
modalità codice	NO / NC (opzionale)
divario	35 ± 5 (mm)
tensione massima	≤100V DC
corrente max	≤500mA
Valutazione Max	≤ 10W
Colore	Marrone / Bianco (opzionale)
vestito per	serramento metallo
Materiale	custodia ABS a prova di fuoco
Temperatura di lavoro	-10 °C ~ 50 °C
Peso netto	24g

• In-kind shooting

SMQT®



• *Feature*

SMQT®



EB-136

Dimension:	$\phi 19 * 25(\text{mm})$
Material:	ABS
Max Gap:	$\leq 40\text{mm}$
Install way:	Drill hole install
Wire :	22# wire 40cm
Power :	0.5A 10W

Fire-proofing materials

Adopt ABS flame retardant material, fire retardant safer, connecting with 22 # wire, total length of 30 cm. Suitable for metal doors and cabinet door, etc.



Waterproof seal

Using imported PC glue sealing, close the magnet and wiring, waterproof, and durable leakage, using more safe and more comfortable



Strong magnetism

Magnetic strength, which can be installed directly drilling, stable performance.

• Packaging & shipping

SMQT®

lista di imballaggio	
Nome del prodotto	Emedded sensore contatto magnetico EB-136
Quantità	600 pc per scatola
formato della scatola	38 * 30 * 30 (cm)
Peso	16kg



• Office show

SMQT®



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....