

• Parameter

SMQT

Taglia del prodotto	90L * 65W * 25.5H (mm)
Alimentatore esterno	DC9V
Caratteristiche di interfaccia	Interfaccia compatibile con EIA / TIA RS-232C, RS-485 / RS-422 di serie
Interfaccia elettrica	RS-232C interfaccia DB9 femmina porta del connettore, RS-422 / RS-485 DB9 connettore femmina ed è dotato di sei terminali
Velocità di trasmissione	300-115.2KBPS
indicazione del segnale	Tre segnali luminosi TXD RXD POWER
mezzo di trasmissione	doppino schermato
Classe di protezione	RS-232 \pm 15KVESD protezione, RS-422 / RS-485 a 600W per linea protezione da fulmini
Isolamento	3500VRMS
Tensione di isolamento	500VDC continua
Ambiente	5% a 95%
Temperatura di esercizio	0 °C ~ 50 °C

Introduction

SMQT

Il convertitore di controllo porta di accesso è a 2 fili convertitore RS485 RS422 Ethernet e convertitore DC per la casa.



•Feature



Converter RS232 to RS485 Interface compatible with EIA / TIA RS-232C, RS-485 / RS-422 standard Electrical Interface:

RS-232C interface DB9 female connector port, RS-422/485 Interface DB9 female connector

Transmission medium:shielded twisted pair wire


300-115.2KBPS transmission rate
Lightning surge protection

Working Humidity:5%~95% Environment temprature:0 C~50 C Net weight:0.62kg

Welcome OEM and 2 years quality warranty

Installation

SMQT

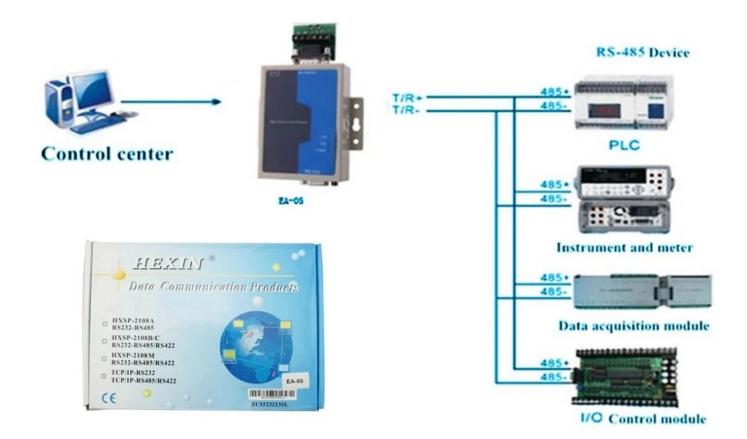

•Show case



Packaging & shipping

SMQT



• Office show















• Exhibition smot

