

# Wired metal magnetic contact sensor

*NO/NC code mode optional*

*50±10(mm) gap distance*

*Max voltage ≤100VDC, Max current ≤500mA*


*Alloy-zn material*

*Suitable for metal door or window*

*Grey color*

*Weight : A:150g B:100g C:50g*

**SMQT®**

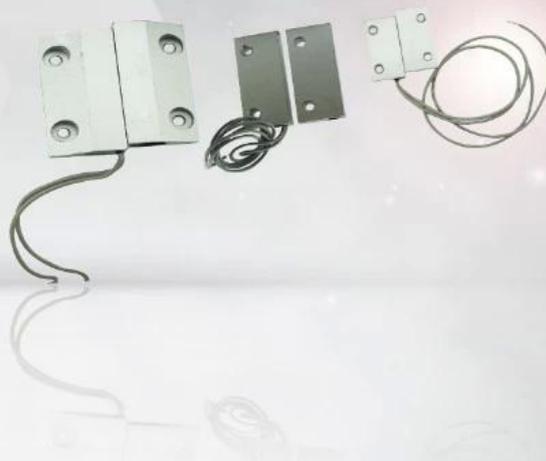

## • Parameter

**SMQT®**

Modello	EB-138A	EB-138B	EB-138C
Dimensioni	46 * 21 * 12 (mm)	47 * 17 * 7 (mm)	30 * 13 * 6 (mm)
Connessione	Normalmente aperto / normalmente chiuso	Normalmente aperto / normalmente chiuso	Normalmente aperto / normalmente chiuso
distanza operativa	50 ± 10 (mm)	50 ± 10 (mm)	50 ± 10 (mm)
pressione massima	≤100VDC	≤100VDC	≤100VDC
potere di funzionamento	≤ 10W	≤ 10W	≤ 10W
Materiale alloggiamento	In lega di zinco	In lega di zinco	In lega di zinco
portata	Ferro serramento	Ferro serramento	Ferro serramento
corrente di carico	≤500mA	≤500mA	≤500mA
Peso del prodotto	150g	100 grammi	50 grammi

## • Introduction

**SMQT®**

L'interruttore di contatto magnetico per porta è il sensore magnetico del portello per il sistema di controllo accessi porta magnetica e sistema di allarme porta magnetica.

# PRODUCT PICTURE



• *Feature*

**SMQT**

# PRODUCT FEATURE



EA-138A

EA-138B

EA-138C

*Wired metal magnetic contact sensor*

*NO/NC code mode optional*

*50±10 gap distance*

*Max voltage:≤100V DC, Max current≤500mA*

*Max rating≤10W*

*Alloy-Zn material*

*Suitable for metal door or window*

*Weight: A:150g B:100g C:50g*

*Welcome OEM, 2 years quality warranty*



## • Office show

SMQT®



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair