

SMQT rilevatore di fumo e calore composto a 4 fili



COSA SIGNIFICA EB-1178?



INFORMAZIONI SUL PACCHETTO STANDARD EB-1178?



EB-1178 PARAMETRO PRINCIPALE

Nome del prodotto:	SMQT rilevatore di fumo e calore composto a 4 fili
Numero di modello:	EB-1178
Alimentazione elettrica:	DC 9 ~ 36V
Dimensione:	Diametro 103 * 53 (mm)
caratteristica:	Le funzioni di rilevazione del calore e del fumo sono composte
Allarme di calore:	& Gt; 57 Gradi Celsius allarmerà
Area di rilevamento:	20 metri quadrati (meno di 6 m di altezza di installazione)
Indicazione di allarme	Flash LED rosso & allarme acustico
Adatto a:	Allarme antincendio
Modo di installazione:	Montato a soffitto
Temperatura di lavoro:	-10 Gradi Celsius ~ +50 gradi Celsius
Umidità di lavoro:	0 ~ 95% RH (senza condensa)
Peso:	0.19kg
GUIDATO:	2 luci a LED
Materiale:	Custodia ABS + scheda PCB
Colore dell'alloggiamento:	bianca
Garanzia:	2 anni di garanzia
OEM:	Benvenuto OEM

QUALI CARATTERISTICHE EB-1178 HANNO?



1. Wired heat&photoelectric smoke detector

2. Working power 9~36V DC

3. Standby current : ≤ 0.2 mA(12V NO) ; ≤ 4 mA(12V NC)

4. Alarm current:10 mA(12V NO),7 mA(12V NC)

5. Alarm indication:Red LED on

6. Wire port: POWER+(In)/POWER- / COM/NO or NC

7. Suitable for fire alarm system

8. Conformed GB4715 GB716 EN14604 standard



9. 2 years warranty , welcome OEM

COME FUNZIONA EB-1178?




Size



Module Display

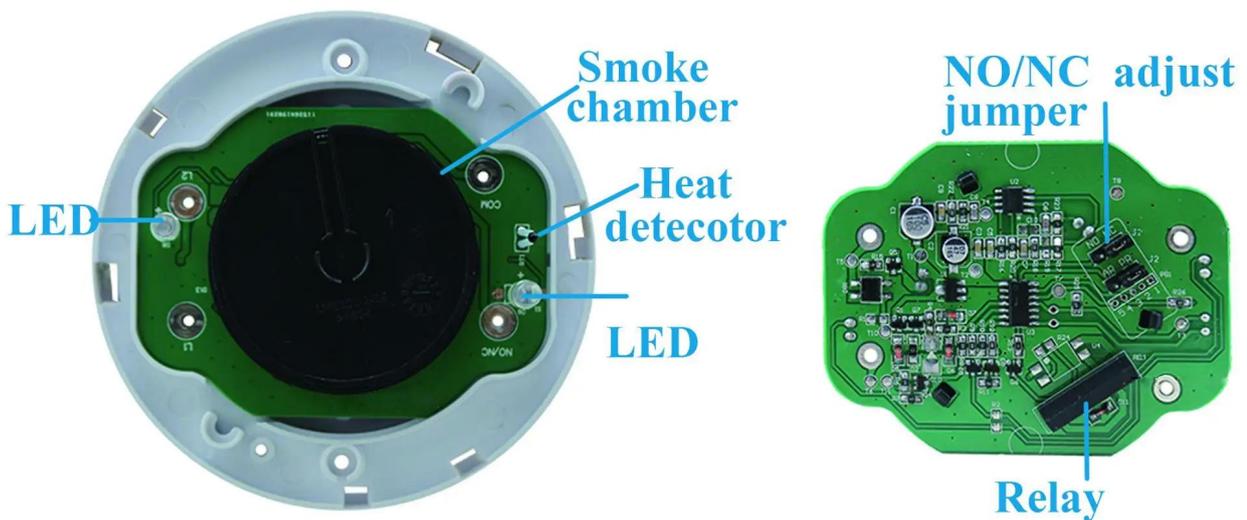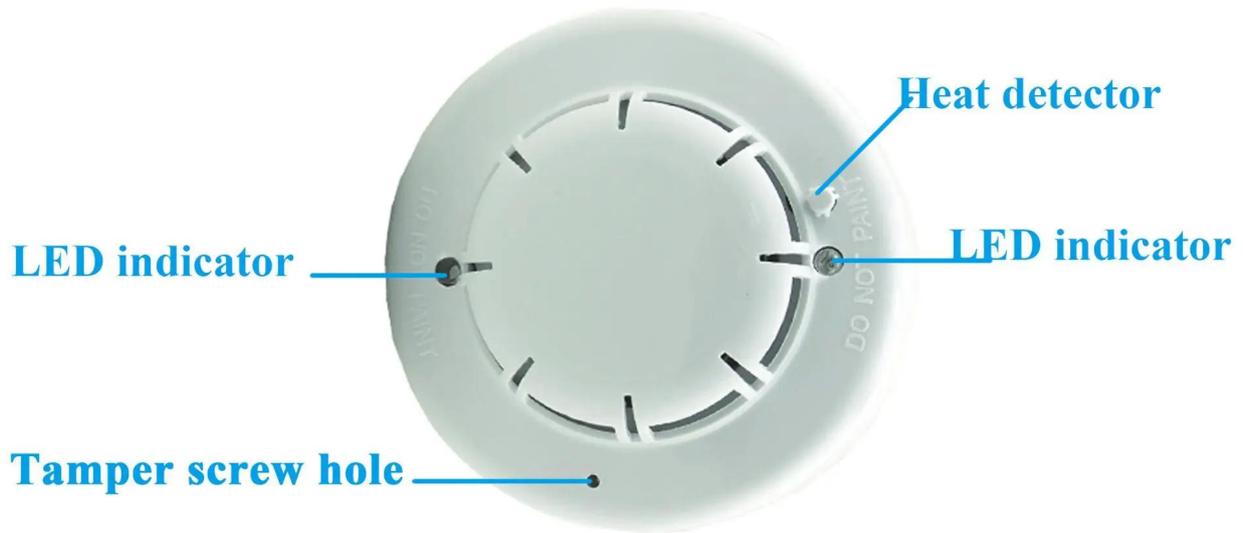

How to connect wire?

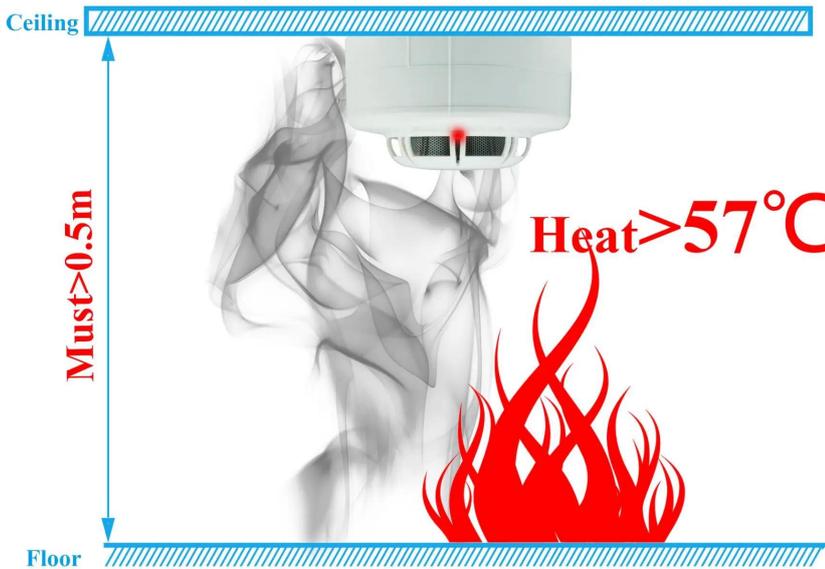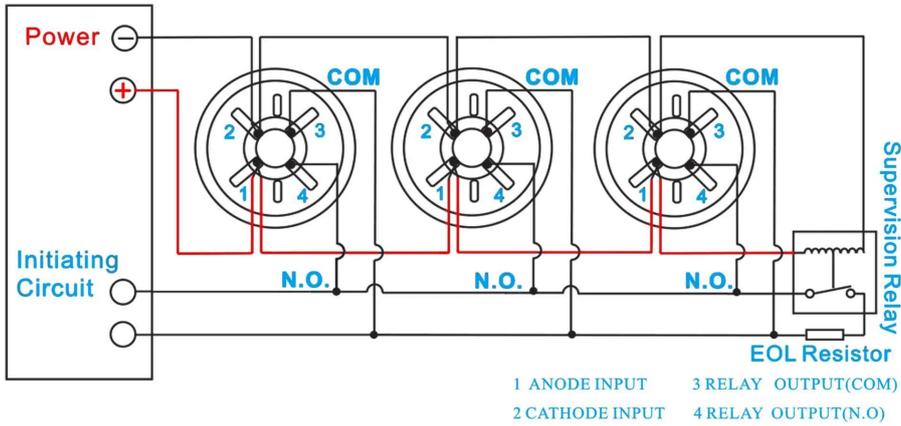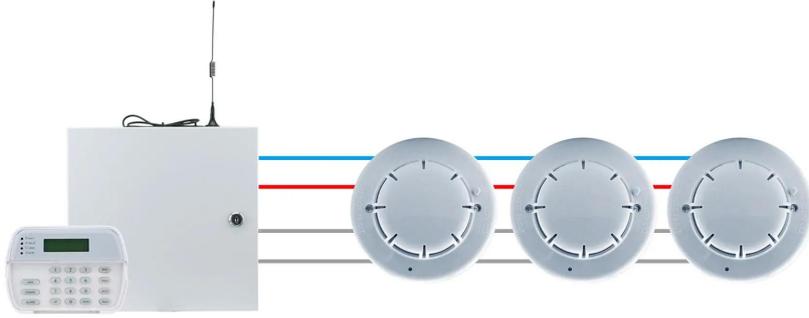

Where to installation?



BANK



HOSPITAL



SCHOOL



COMPANY



HOME



MALL



HOTEL



APARTMENT

COME DI ALTRE SCELTE?

