




<b>specificazione</b>	
Nome del prodotto:	Rilevatore di fumo autonomo, sensore fumo wireless, allarme fumo
Dimensione:	Ø106mm * 59 millimetri
Tensione di lavoro:	Batteria 9V 6F22
Corrente di standby:	≤15uA
Corrente di allarme:	≤56mA
Durata della batteria:	meno di 1 anno
Indicatore di energia:	RLED ed
Indicatore di allarme:	Ril LED ed il flash lampeggiano
Pressione sonora:	85dB / m
Temperatura di lavoro:	-10 ° C ~ 50 ° C
Umidità di lavoro:	≤95% RH
Distanza di trasmissione:	& It; 100m (area aperta)
Criterio di esecuzione:	EN14604
Area di rilevamento:	40 metri quadrati in caso di altezza di installazione tra 6 e 12 metri. 20 metri quadrati in caso di altezza di installazione entro 6 metri.

**Quali caratteristiche del nostro rilevatore di fumo?**

# Standalone Gas detector

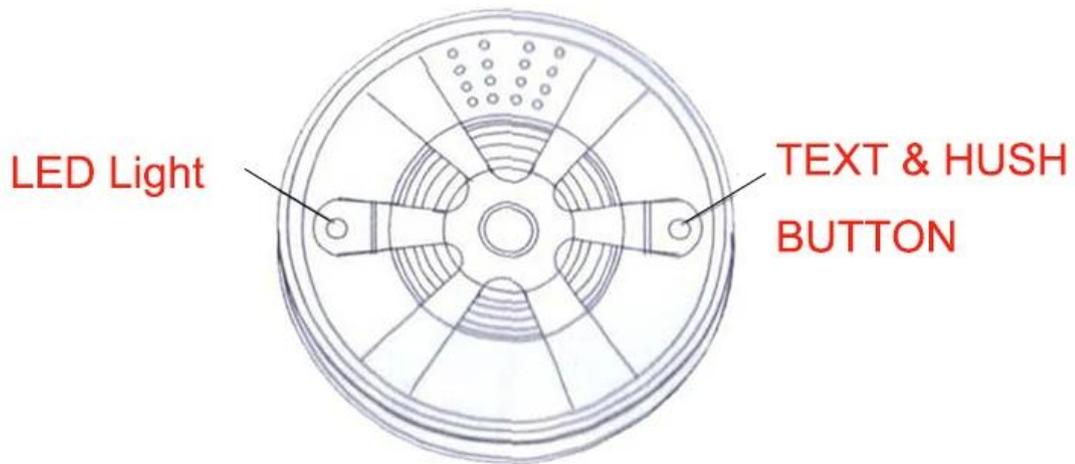

The detector adopts the reflection principle of smoke particles that can reflect infrared light. The main circuit includes a MCU processing section, an infrared-emitting portion, and an infrared receiving portion.



Detector will get into normal working state after connecting battery power, LED will flash once per every 42 seconds.

## TIRO IN GENERE



## VETRINA



## SPETTACOLO DELL'UFFICIO



## CLIENTE



## ESPOSIZIONE



## CERTIFICATO



## COME COOPERAZIONE



<b>Trade terms:</b>	<b>EXW</b>
<b>Payment terms:</b>	<b>T/T, Western union, Paypal etc</b>
<b>Delivery time:</b>	<b>Normal order within 7 days, bulk order 10-15days</b>
<b>Packing:</b>	<b>Neutral paper box and paper carton</b>
<b>Shipping:</b>	<b>Express company or by sea, by air or appointed by buyer</b>