

Wired magnetic door contact sensor

NO/NC mode optional

20±5(mm) gap distance

MAX Voltage≤100VDC,MAX current≤500mA

Suitable for wooden door or window

Fireproof ABS shell,White/Brown color optional

Weight10g

SMQT®



• Parameter

SMQT®

Parametro	
Nome del prodotto	sensore Wired porta magnetica
Modello	EB-134
Dimensione	24 × 41 × 6 (mm)
modalità codice	NO / NC (opzionale)
divario	20 ± 5 (mm)
tensione massima	≤100V DC
corrente max	≤500mA
Valutazione Max	≤ 10W
Colore	Marrone / Bianco (opzionale)
vestito per	porta o finestra in legno
Materiale	custodia ABS a prova di fuoco
Temperatura di lavoro	-10 °C ~ 50 °C
Peso netto	10g


• In-kind shooting

SMQT®



• *Feature*

SMQT

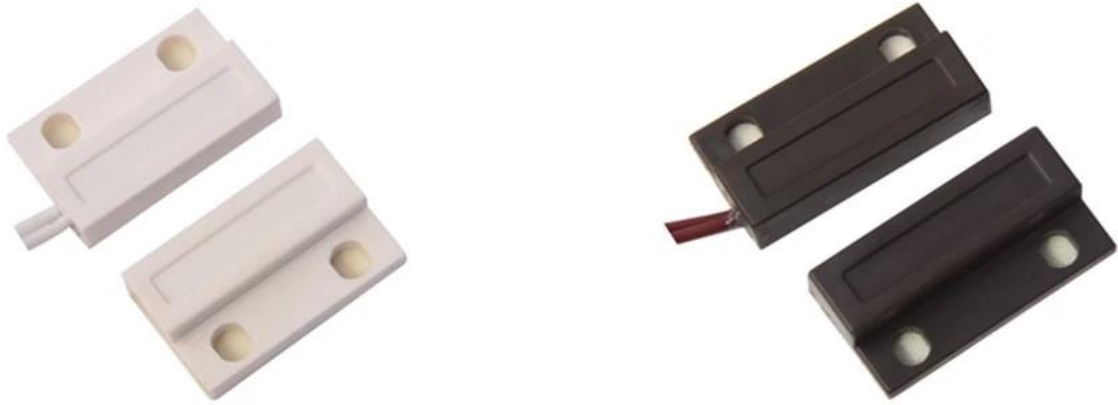

EB-134

Dimension:24×41×6(mm)

NO/NC mode optional(default is NC mode)

20±5(mm) Gap

MAX voltage≤100VDC,MAX current≤500mA

Suitable for Wooden door or window

Fireproof ABS material shell

White/Brown color optional

Weight 10g

Welcome OEM, 2 years quality warranty

● ***Packaging & shipping***

SMQT

lista di imballaggio	
Nome del prodotto	EB-134
Quantità	1600 pc per scatola
formato della scatola	38 * 30 * 30 (cm)
Peso	20kg



WE LOGISTICS



• Office show

SMQT



• Exhibition

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....