

Wireless door sensor

Fireproof ABS shell

DC 12V power supply

Wireless frequency 315Mhz/433Mhz optional

Wireless signal transmisson distance max 100m

SMQT®



• Parameter

SMQT®



specificazione	
Nome del prodotto	sensore magnetico del portello senza fili
Numero di modello	EB-130
Tensione di funzionamento	12V
distanza operativa	40 ± 5 (mm)
frequenza di trasmissione	315MHZ / 433MHZ
distanza di trasmissione	≤100M

• Introduction


SMQT®

Il sensore di contatto porta wireless è la magnetica 12v interruttore del sensore e sensore di allarme tenda senza fili per il sistema di allarme.

PRODUCT PICTURE

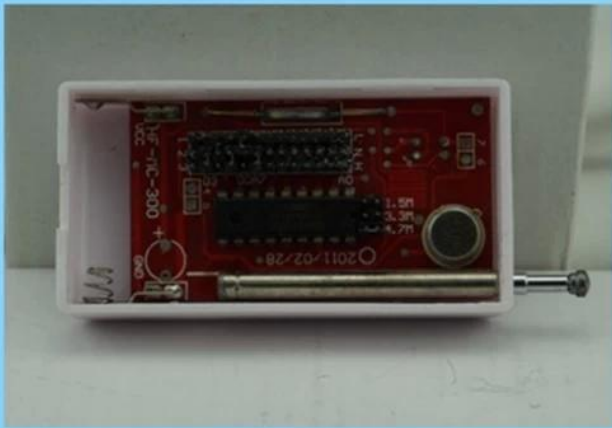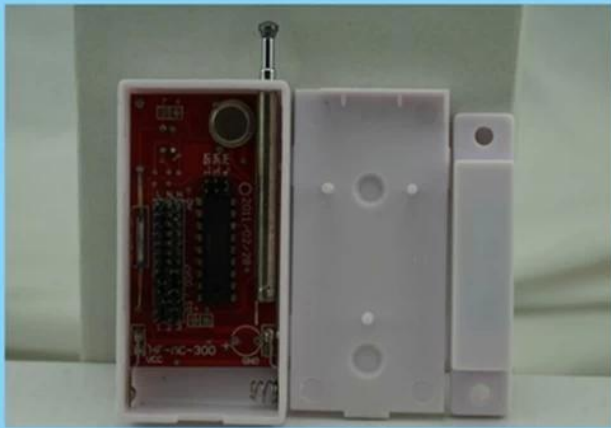

PRODUCT FEATURE

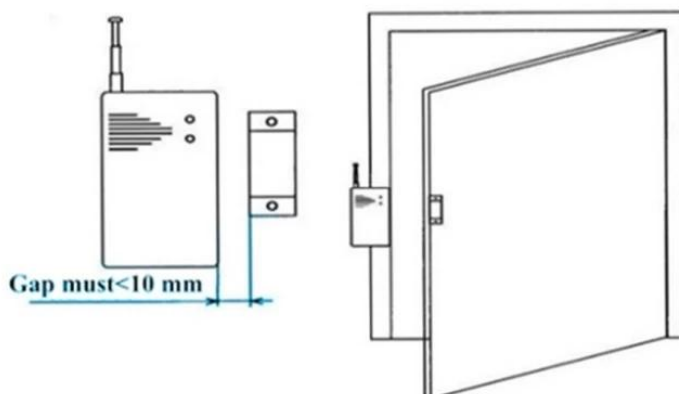

Function: To detect the door, window, drawer, ambry is illegally open or move.

Features: Triggered under the armed state, there will be alarm signal to send to alarm host.

Installation: installed at the closed door and drawer. (PS: Detectors and magnetic stripe is opposite, the spacing of less than 1 cm)



Installation Instruction

1. Emitter and magnetic stripe with two-side glue stick on the door and door frame, as far as possible between closed without gap
2. Suitable for wood door/window or glass door/window.

• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

