

Wired magnetic contact sensor

NC/NO mode optional

20±5(mm) gap distance

MAX voltage≤100V DC,MAX current≤500mA

Suitable for wooden door or window

White/Brown color optional

12g weight

SMQT



• Parameter

SMQT

	specificazione
Nome del prodotto	Wired porta sensore magnetico di contatto
Numero di modello	EB-134
Dimensioni	24L * 14W * 6H (mm)
Connessione	Normalmente aperto / normalmente chiuso
distanza operativa	20 ± 5 (mm)
pressione massima	≤100VDC
corrente di carico	≤500mA
potere di funzionamento	≤ 10W
Materiale alloggiamento	ABS materiale ignifugo
colore forma	Marrone / Bianco
portata	porta o una finestra non ferrosi
Peso del prodotto	10g

• Introduction

SMQT

Il sistema di controllo di accesso del portello magnetica e allarme porta magnetica è la magnetica porta Rilevatore di contatto porta senSor.


PRODUCT FEATURE



• *Feature*

SMQT

PRODUCT FEATURE

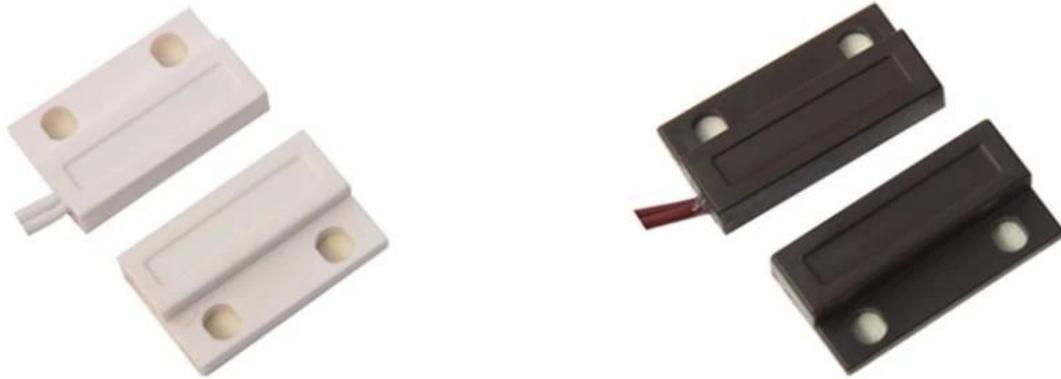

EB-134

Dimension: 24×41×6(mm)

NO/NC mode optional (default is NC mode)

20±5(mm) Gap

MAX voltage ≤ 100VDC, MAX current ≤ 500mA

Suitable for Wooden door or window

Fireproof ABS material shell

White/Brown color optional

Weight 10g

Welcome OEM, 2 years quality warranty

• *Packaging & shipping*

SMQT



● Office show

SMQT®



● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....