

Wired infrared 2 beams perimeter detector



no intruding
no across

• Parameter

SMQT®

Pangalan ng Produkto	Outdoor waterproof Beam sensor
Model number	ABT
operating boltahe	13.8 ~ 24VDC 11 ~ 28VAC
operating kasalukuyang	40-65mA
Indikasyon speed	50 ~ 700m / sec
Anti-demolition output	NC
Environment temperatura	-20 °C ~ + 50 °C
Alarm output	NO / NC
adjustment Level	180 ° ± 90 °
Vertocal adjustment	± 10 °
kulay	itim
materyal	PC dagta

• Introduction

SMQT®

PRODUCT PICTURE




Ang infrared beam barrier motion detector ay ginagamit sa bakod tulad ng

infrared bakod detector trabaho sa sistema ng alarma.

• Dimension

SMQT®

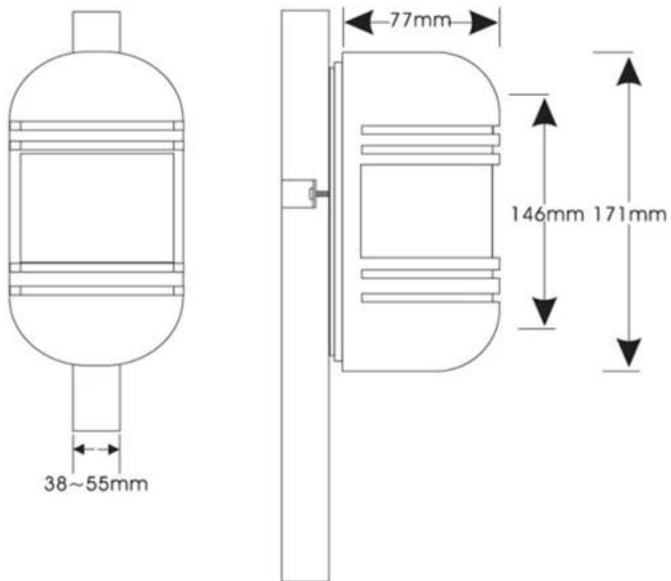

• Feature

SMQT®

PRODUCT FEATURE



Sealed integration structure is able to work in the harsh environment

Automatically regulate to confront with fog or inclement weather

Sensitivity (AGC circuit)

easily adjust and calibrate the horizontal/vertical optional angle

Built-in integrate optical telescopes, anti-jamming jacket

Anti-lighting circuit designed

High-power infrared receiver on the tubes, low-power digital

• *Packaging & shipping*

SMQT®



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair