

Wired magnetic contact sensor

NC/NO code mode optional

20±5(mm) gap distance

MAX voltage≤100V DC,MAX current≤500mA

Suitable for wooden door or window

Fireproof ABS material shell

White/Brown color optional

8g weight

SMQT®



• Parameter

SMQT®

parametro	
Pangalan ng Produkto	lingid magnetic contact sensor
modelo	EB-135
sukat	Φ10 × 18.5 (mm)
code mode	NO / NC (opsyonal)
puwang	20 ± 5 (mm)
Max boltahe	≤100V DC
Max kasalukuyang	≤500mA
Max rating	≤10W
kulay	Brown / White (opsyonal)
suit para sa	kahoy na pinto o window
materyal	Fireproof ABS pabahay
Paggawa temperatura	-10 °C ~ 50 °C
net timbang	8g

• In-kind shooting

SMQT®



• *Feature*

SMQT



Door Magnetic Contact safe door happy life




(Notice: need match the home alarm system to



Sash window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

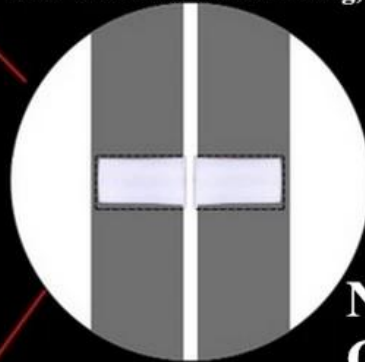

Notice:
Gap < 2cm



Sliding window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

2 Color optional



• Packaging & shipping

SMQT®

listahan packaging	
Pangalan ng Produkto	Lingid magnetic contact sensor EB-135
Dami	2000 mga PC ng bawat karton
carton laki	38 * 30 * 30 (cm)
timbang	21kg



• Office show

SMQT®



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair