


serial tampok	Interface katugma sa EIA / TIA RS-232C, RS-485 standard
electrical Interface	RS-232C terminal DB9 babae connector port, RS-485 terminal DBP pin connector port na may terminal (apat o anim na mga kable kable)
trabaho	Asynchronous half-duplex
transmission medium	Ordinary line, baluktot pares o shielded cable
transmission rate	300-115200BPS
transmission distansya	5 m (RS-232 terminal) 1200 m (RS-485 terminal)
Communication Protocol	malinaw
senyas	RS-232: TXD, RXD, RTS, CTS, DTR, DSR, DCD, GND RS-485: Petsa +, Date-, GND
Paggawa kapaligiran	-10 °C ~ 85 °C
operating temperatura	5% hanggang 95%
Power Supply	Mahusay na serial paganakaw teknolohiya, walang mga panlabas na kapangyarihan supply, real tatlong linya (TD, RD, GND) sistema ng komunikasyon

Ang converter ay maaari convert RS-232 serial port TXD at RXD signal sa balanse half-duplex two-wire RS-485 signal. Walang mga panlabas na kapangyarihan supply, direkta mula sa 3 talampakan RS-232 port paganakaw, habang ang 7 talampakan Kahilingan na si (RTS), 4 pin Data Terminal Handa (DTR) sa auxiliary power supply converters, automatic daloy control kaya hindi mo na kailangang muling hanay ng mga hardware at pag-install ay napaka-simple.

Mga Application: Point-to-multipoint komunikasyon; Industrial sistema ng pamamahagi, pang-industriya control automation; Road trapiko control automation; Isarado ang circuit monitoring; systems Security; Smart cards, pagdalo access control systems.



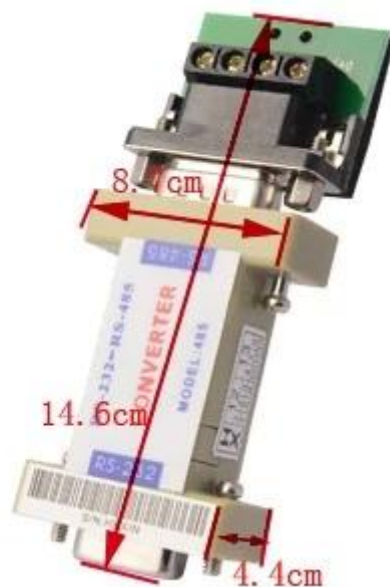

● 产品优势



Wire kalahati duplex, mahusay pagnanakaw, walang mga panlabas na kapangyarihan supply, suporta remote 1.2km, 128 nodes, serial proteksyon, hot-swappable, na may lamang RX at TX, bilis ng hanggang sa 115.2k, pang-industriya disenyo, anti-kidlat, anti-static, malawakang ginagamit sa pang-industriya automation sistema ng kontrol, card access control systems, parking sistema, automated banking system, sasakyan singilin sistema, empleyado pagdalo management system, highway toll system.

● 产品包装



六接口



四接口

● 装箱清单



QTY	100 / box
Packing Mismong	53L * 40W * 36.5H (cm)
Packing timbang	8.88Kg