


| Specification | | |
|---|----------------------------|-------------------------|
| Product name | One Channel Remote Control | |
| Product number | EA-11-1-12 | EA-11-1-24 |
| Operating Voltage | DC12V | DC24V |
| Operating temperature | -20 °C ~ 80 °C | -20 °C ~ 80 °C |
| Reception frequency | 433MHZ 315MHZ | 433MHZ 315MHZ |
| Receiver sensitivity | -105dB | -105dB |
| Encoding type | Learning pairing button | Learning pairing button |
| Output current | ≤ 7A | ≤7A |
| Transmitter maximum number of connections | 30 | 30 |

Wireless digital identification technology, separate password for each switch, will not interfere with each other.

Radio frequency remote control, no direction, the signal can pass through walls.

No wiring, save wiring costs, saving time and effort.

Learning multifunctional, equipped with a simple remote control, you can choose to move the interlocking self-locking.

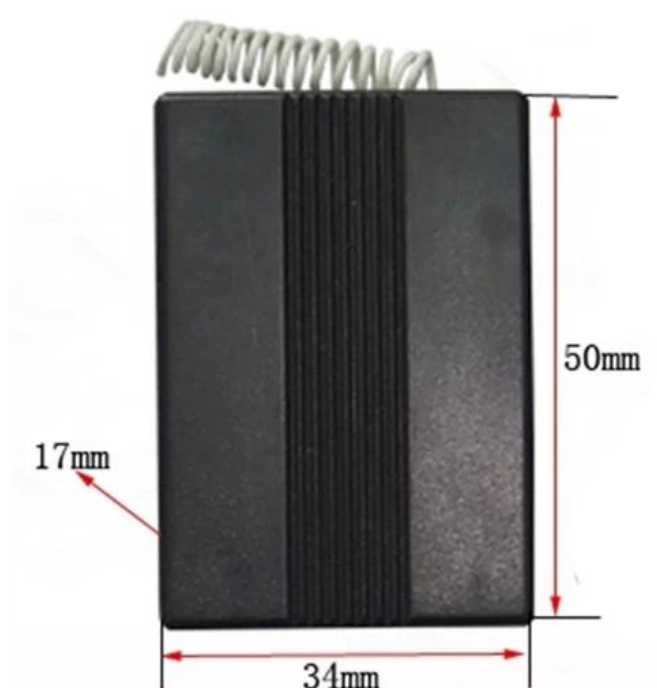


● Installations

SMQT®



● Features

SMQT®

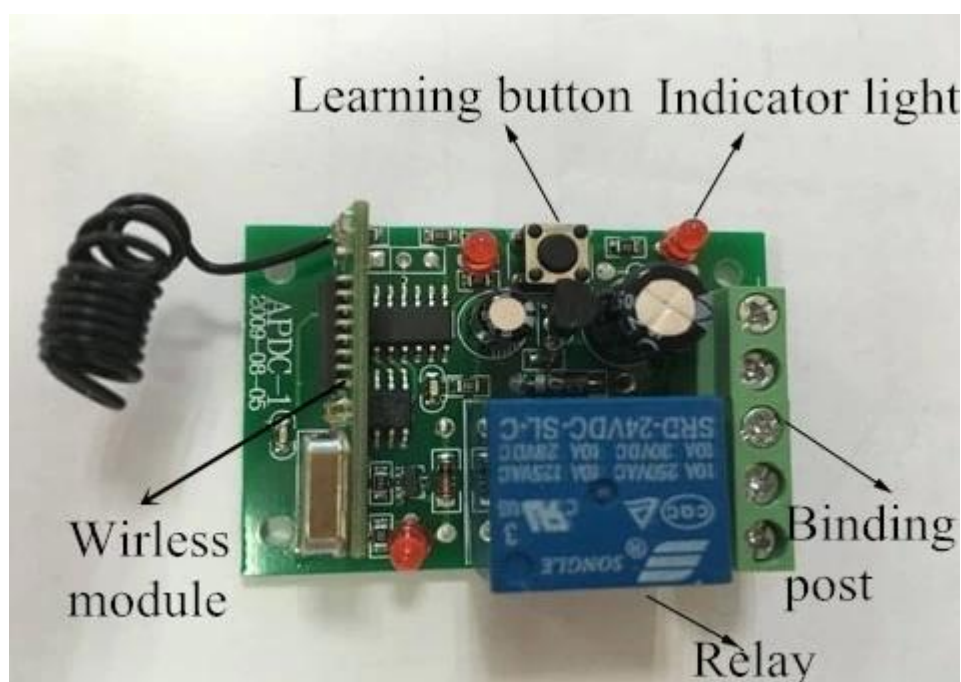

● Packing list

SMQT®

| One Channel Remote Control EA-11-1-12/24 | | |
|--|----------------------|----------------------|
| Product number | EA-11-1-12 | EA-11-1-24 |
| Qty | 100 / box | 100 / box |
| Packing Specifications | 44L * 31W * 30H (cm) | 44L * 31W * 30H (cm) |

| | | |
|----------------|-------|-------|
| Packing weight | 8.6Kg | 8.6Kg |
|----------------|-------|-------|



● In the Office

SMQT®



● Exhibitions

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair