

Specification	
Product Name	Touch Door Release Button
Dimensions A	86 * 50 * 25 (mm)
Dimensions B	86 * 86 * 25 (mm)
Input voltage	DC12V
Standard Structure	Plexiglass touch trigger
Durability test	500,000 times aging tested
For Type	For a variety of narrow door frames
Temperature	-20°C ~ + 50°C
Moderate applicable	0 to 95% (relative humidity)
Trigger device	touch

● Introduction

- 1.Button design simple and beautiful, plexiglass panels using materials, touch-sensitive door, use the contact button light touch response interactive design, internal use of imported raw materials Bayer PC plastic production, waterproof and dustproof design, easy to change color temperature Fight five hundred thousand times aging tested for light relatively dark place.
- 2.Induction touch switch out (infrared detector).
- 3.Infrared optical technology
- 4.Easy operation
- 5.Sensing range: 0.1 to 20 cm (according to the site environment)
- 6.Applications: access control / entrance / automatic control
- 7.Relay switch output
- 8.Exit button touch-type (with backlight), but with normally open, normally closed.

● Dimesion Picture



Switch Power Supply



Touch Induction
Door Release button
EB-20B



EM lock




Single Door Access
control Keypad

1 Superior Design

Touch push button design simple and beautiful, Panel using organic glass materials, touch induction to open the door, button USES the interactive design of light touch response. Internal using PC rubber production, high temperature resistant do not fade

Resistance to heat shock Organic glass touch responsive

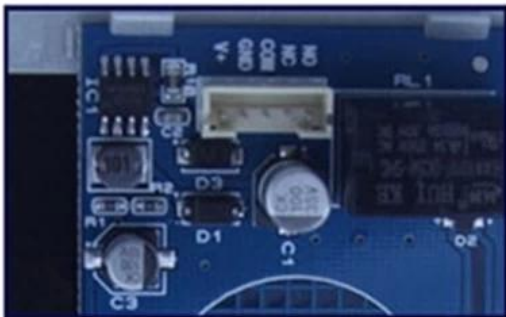

2 Product components

500,000 times test qualified, the relay switch power output, (NO NC COM) 3 lines button suitable for all Access control system

NO NC COM, 3 lines

3 Strong stability

Waterproof and dustproof more durable and strong, resistance to high temperature shock do not fade.


Waterproof and Dustproof Stable solid long life



● Packing list

SMQT

Packaging List		
Product number	EA-20A	EA-20B
Qty	100 / box	100 / box
Packing Specifications	46.5L * 37.5W * 28H (cm)	46.5L * 37.5W * 28H (cm)
Packing weight	5.8Kg	8.5Kg

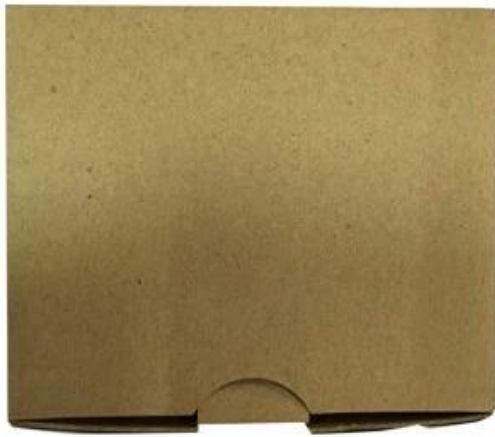



● Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

