

● Parameter

SMQT

number ng produkto	EA-22A	EA-22B
Standard Structure	Aluminum panels, mga pindutan metal	Aluminum panels, mga pindutan metal
electrical Performance	Kasalukuyang maximum na tibay 3A36VDC	Kasalukuyang maximum na tibay 3A36VDC
tibay test	500,000 beses aging nasubok	500,000 beses aging nasubok
para sa Uri	Nauukol guwang frame at lubog electrical box	Nauukol guwang frame at lubog electrical box
temperatura	-10 ~ + 55 °C	-10 ~ + 55 °C
Nauukol halumigmig	0 Mga sa 95% (kamag-anak kahalumigmigan)	0 Mga sa 95% (kamag-anak kahalumigmigan)
panel Processing	Aluminum panels sandblasted	Aluminum panels sandblasted

● Introduction

SMQT

Propesyonal na disenyo, walang mechanical failure.

Luxury disenyo, maganda at matibay.

Access proyekto itinalagang matching produkto.

500,000 nasubok tibay.

Panel Processing: flash pilak aluminyo panel sandblasting.

Para sa uri pinto; sapagka't guwang frame at lubog electrical box apply.

Door release button EA-22A / B na may hindi tinatagusan ng tubig function. Ang exit button meatrial ay metal finished. The push button switch na may metal button, ABS button, pindutin ang button atbp


● Dimesion Picture

SMQT



● Installations

SMQT

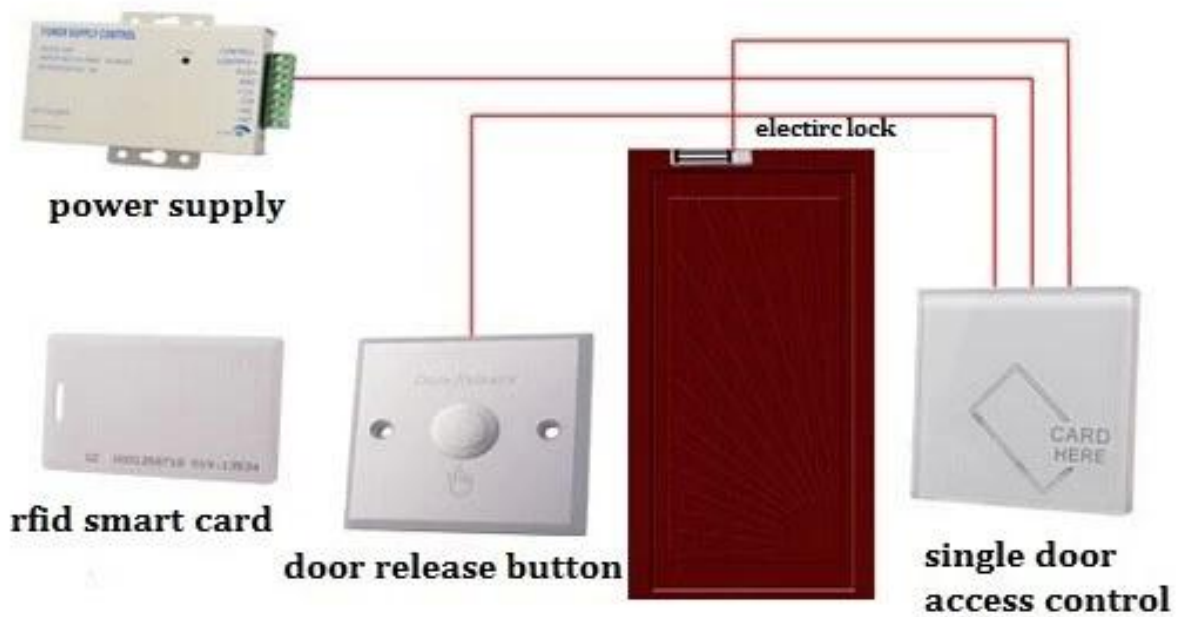

● Features

SMQT



EA-22B

Advantages

Aluminum panel with the sand blast treatment

Pure copper plating nickel button

500,000 times mechanical test

● Packing list

SMQT



number ng produkto	EA-22A	EA-22B
Dami	100 / box	100 / box
Packing Mismong	46.5L * 37.5W * 28H (cm)	46.5L * 37.5W * 28H (cm)
Packing timbang	16Kg	25kg

● Office

SMQT



● Exhibitions



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....