■ Parameter SMQT

| Spcification | | |
|------------------------|---|--|
| Product name | Plastic Door Release button | |
| Model | EA-26A/B/C | |
| Dimensions A | 86 * 86 * 20 (mm) | |
| Dimensions B | 86 * 86 * 20 (mm) | |
| Dimensions C | 86 * 86 * 30 (mm) | |
| Standard Structure | Fireproof materials mixed resin | |
| Electrical Performance | Current maximum durability 3A36VDC | |
| Durability test | Hundred thousand times aging tested | |
| For Type | Applicable hollow frames and submerged electrical box | |
| Panel Processing | Fireproof material naked surface treatment | |

Introduction
SMQT


It can be any combination of various shades of environment, highlighting the elegance; to create a modern, sleek, minimalist atmosphere.

User-friendly design, the details determine safety; large buttons, use handy.


High-end frame, flame, compressive strength, durable, safer and more reliable installation. Large wiring space, Phillips or slotted screwdriver to install.

Dimesion Picture

SMQT

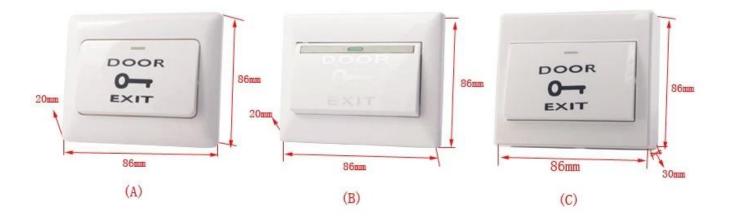

● Installations SMQT

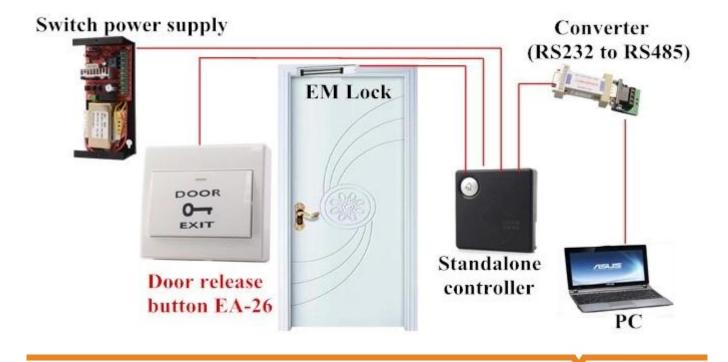

• Features SMQT

The price is cheaper, no computer knowledge decorators can be installed. Large wiring space, Phillips or slotted screwdriver to install.

High-end frame, flame, compressive strength, durable, safer and more reliable installation. User-friendly design, the details determine safety; large buttons, use handy.

Packing list SMOT

| Packaging list | | |
|------------------------|-----------------------------|--|
| Product Name | Plastic Door Release Button | |
| Qty | 100 / box | |
| Packing Specifications | 50L * 33W * 31H (cm) | |
| Packing weight | 7.52Kg | |







• Office SMQT













Exhibitions
SMQT

