


• *Parameter*

SMQT

Pangalan ng Produkto	Photoelectric Usok detektor
modelo ng produkto	EB-117
operating temperatura	-10 °C ~ + 50 °C
Alarm concentration	0.65 ~ 15.5% FT
Paggawa halumigmig	10 sa 90%
Power supply	DC12 / DC9V
signal output	NC / HINDI
Kabitan	kisame
kabibi	retardant dagta
Sukat ng produkto	Φ104 * 51 (mm)

• *Introduction*

SMQT

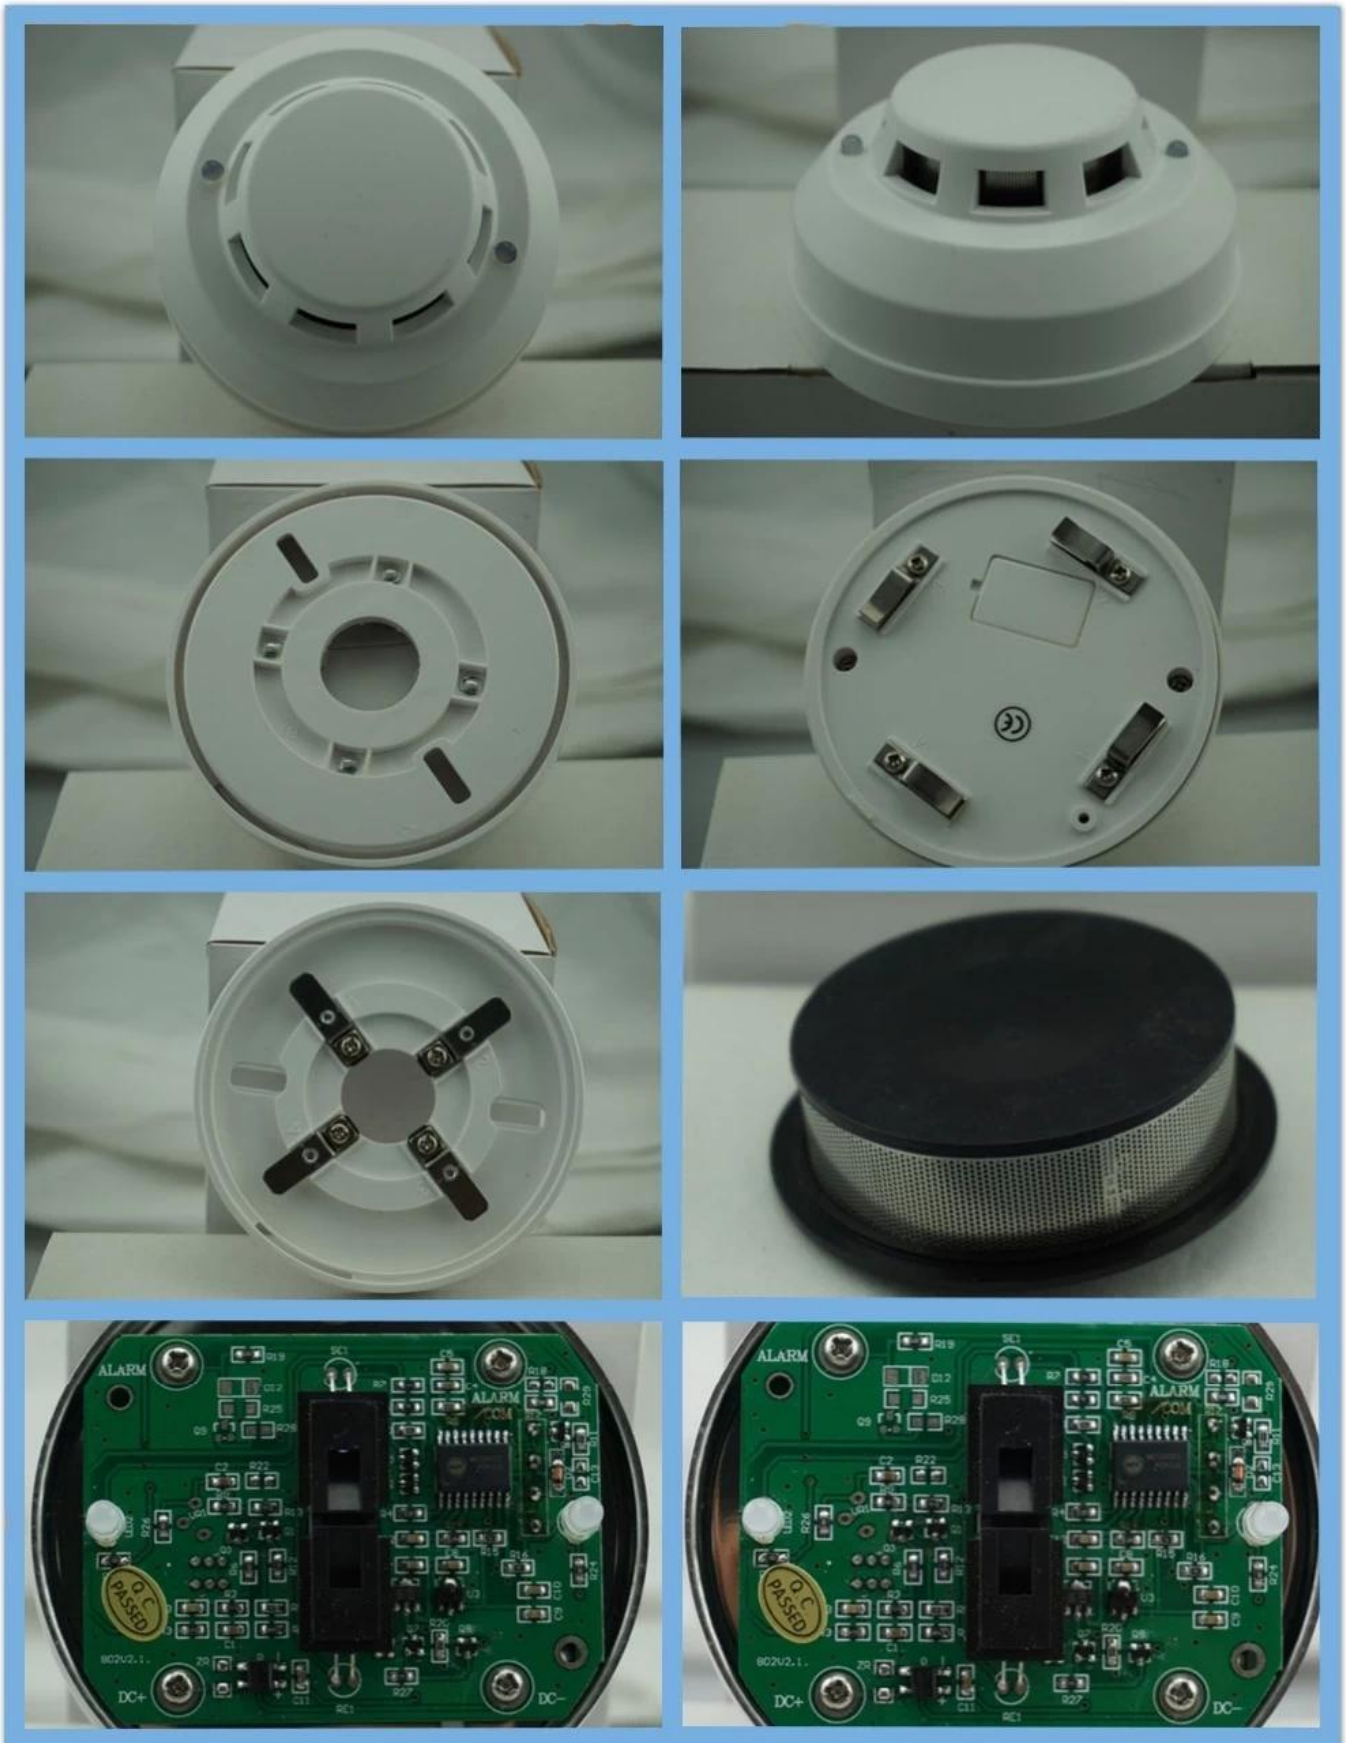

Wireless emergency strobe alarma sirena output ay 9V at 12V DC na ginagamit para sa sistema ng alarma.

• *Dimension*

SMQT[®]



• *Feature*

SMQT[®]

Smoke detector for home security system
Big discounts!!
Best price!!



CE&ROSH
certificate



4 wires smoke detector



Welcome OEM and ODM

produkto 1.This ay non-coding type smoke detectors, at pagkakaroon ng isang pares ng mga switch output contact, ayon sa mga aktwal na pangangailangan upang piliin

ang normal bukas o normal sarado output. Sa panahon ng normal na operasyon, ang indicator flashes isang beses sa bawat siyam na segundo, alarma, indicator

liwanag, at alarma output contact operasyon.

2.Power reset / awtomatikong i-reset opsyonal

3.Promise ng Power Input

- 4.Alarm output NCOptional
- 5.Network output / LED nagpapahiwatig ng isang alarma
- 6.SMT proseso, malakas katatagan
- 7.Dustproof, anti-lamok, anti-puting liwanag panghihimasok disenyo
- 8.Metal shielding, RFI (20V / m-1GHz)

• *Packaging & shipping*

SMQT®



• *Office show*

SMQT®



● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

