

● Parameter

SMQT

| | |
|--------------------------|---|
| operating Boltage | DC12V |
| namamahinga Kasalukuyang | $\leq 10\mu\text{A}$ |
| Alarm kasalukuyang | $\leq 15\text{mA}$ |
| operating temperatura | $-10\text{ }^{\circ}\text{C} \sim + 50\text{ }^{\circ}\text{C}$ |
| Paggawa halumigmig | $\leq 95\% \text{ RH}$ |
| alarma | Wireless signal output / LED nagpapahiwatig ng isang alarma |
| Pagmamanman lugar | 20 m ² |
| sensitivity Level | Level 1 |
| Alarm output | Relay output (NC) |
| Radio dalas | 433MHz / 315MHz |

● Introduction

SMQT

Industrial digital smoke detector wireless connected. The smoke alarm detector presyo ay mas mura sensor para sa sunog alarma system.






â



● Dimension Picture

SMQT

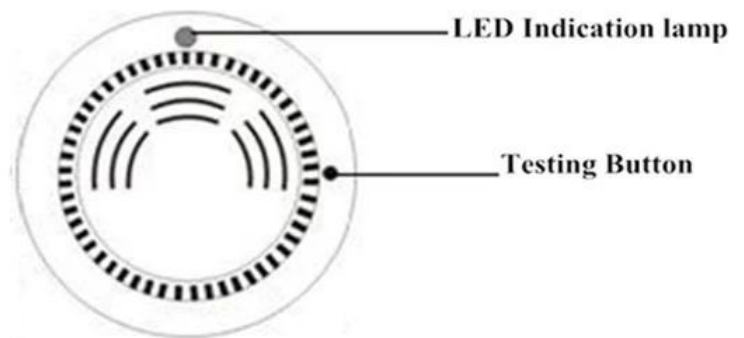

● Installations

SMQT



● Packing list

SMOT



| | |
|-----------------|-------------------------|
| Dami | 108 / box |
| Packing Mismong | 56.6 * 46.8 * 35.5 (cm) |
| Packing timbang | 25kg |

Office

SMQT



Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair