


Pagtutukoy	
Pangalan ng Produkto	Wireless Magnetic Door Sensor
Modelo ng Produkto	EB-130A
Suplay ng kuryente	23A, 12V na baterya
Quiescent Kasalukuyan	≤10UA
Alarm kasalukuyang	≤25MA
kapaligiran sa trabaho	Ang temperatura ng 10 °C ~ 50 °C Kaakibat na kahalumigmigan ≤97%
Distansya ng Paghahatid	Buksan ang lugar na 100 m
Mga sukat	65 * 38 * 20 (mm)
Lokasyon ng pag-install	Mga pintuan, bintana
Materyal na Shell	ABS

- 1, disenyo ng single-chip circuit, matalinong pagproseso, matatag at maaasahan.
- 2, na may mababang boltahe na deteksyon function.
- 3, ang radio frequency wireless transmitter na sumusuporta sa paggamit ng control panel.
- 4, compact na disenyo, magandang hitsura, madaling pag-install.
- 5, subaybayan at kontrolin ang lahat ng mga uri ng mga pintuan at bintana at off.



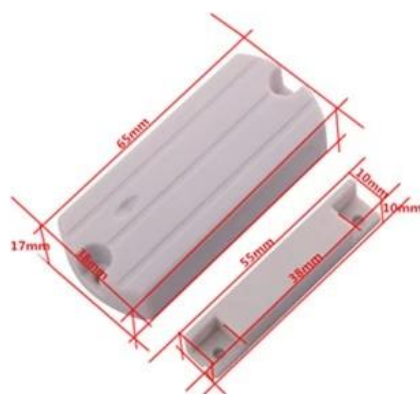

● Installations

SMQT



▲ Installation

Selected installation area ondoor or window, then fixtured it with screws.

Note: The gap must < 45mm.

The working environment should be dry and clean.

● Packing list

SMQT

Listahan ng packaging	
Pangalan ng Produkto	Wireless Magnetic Door Sensor
Qty	200 mga PC / kahon
Sukat ng karton	40 * 30 * 20 (cm)
Timbang	10Kg



● Office

SMQT



● Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....