


Specification	
Product Name	Wired Magnetic Door Contact Sensor
Dimensions	Φ10 * 18.5 (mm)
Connection	Normally open / normally closed
Operating distance	20 ± 5 (mm)
Maximum pressure	≤100VDC
Load current	≤500mA
Working Power	≤10W
Housing Material	ABS fireproof material
Shape color	Brown / White
Scope	Non-ferrous door or window
product weight	8g


2 Color optional



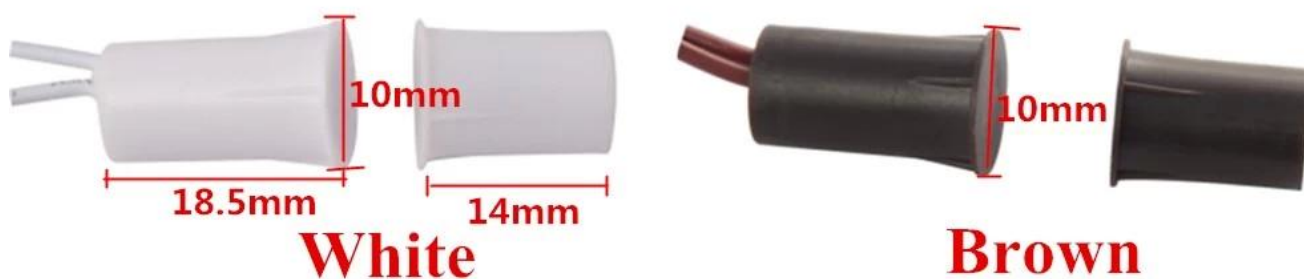

Sash window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

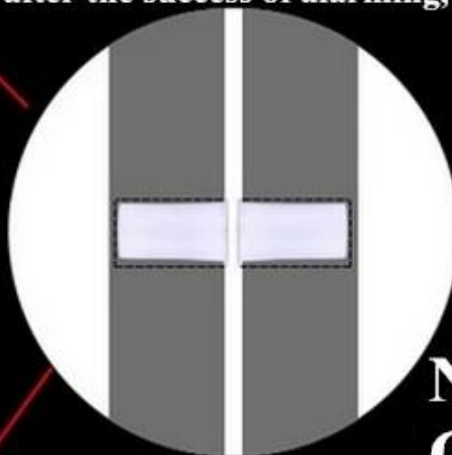

Notice:
Gap<2cm



Sliding window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

● Features

SMQT

- 1.Small size, easy to install, reliable performance, stainless steel, wear-resistant and high temperature.
 - 2.No standby power consumption,
 - 3.Seal installation, stable, when the optical and other types of sensors because the harsh environment does not work,
- the magnetic sensor can still be normal use, simple to install easy to adjust



Suitable for:
Suitable for home anti-theft



Door
Magnetic Contact
safe door happy life

(Notice:need match the home alarm system to

● Packing list

SMOT

Packaging Information	
Qty	2000 / box
Carton size	37.5L * 29.5W * 20H (cm)
Packing weight	20.94Kg





● Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

