


Specification	
Product Name	Wired Magnetic Door Contact Sensor
Dimensions	Φ10 * 18.5 (mm)
Connection	Normally open / normally closed
Operating distance	20 ± 5 (mm)
Maximum pressure	≤100VDC
Load current	≤500mA
Working Power	≤10W
Housing Material	ABS fireproof material
Shape color	Brown / White
Scope	Non-ferrous door or window
product weight	8g


2 Color optional



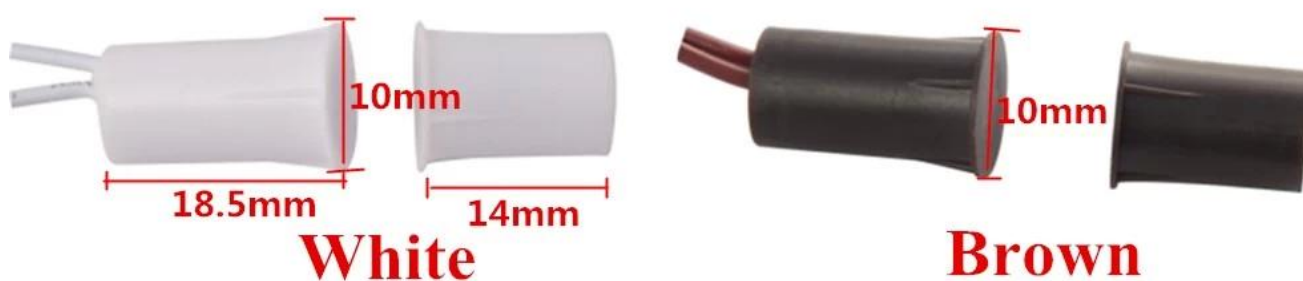

Sash window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

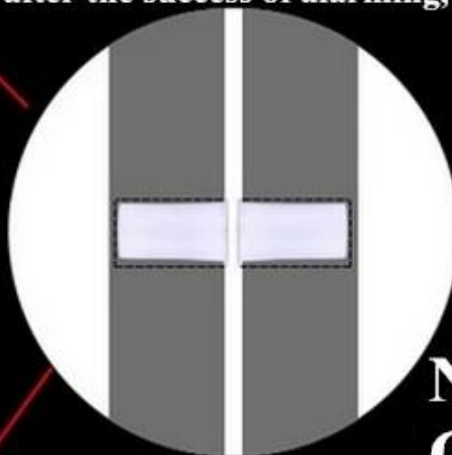

Notice:
Gap<2cm



Sliding window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

● Features

SMQT

- 1.Small size, easy to install, reliable performance, stainless steel, wear-resistant and high temperature.
- 2.No standby power consumption,
- 3.Seal installation, stable, when the optical and other types of sensors because the harsh environment does not work, the magnetic sensor can still be normal use, simple to install easy to adjust



Suitable for:
Suitable for home anti-theft



Door
Magnetic Contact
safe door happy life

(Notice:need match the home alarm system to

● Packing list

SMOT

Packaging Information	
Qty	2000 / box
Carton size	37.5L * 29.5W * 20H (cm)
Packing weight	20.94Kg





● Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

