


Vibrate sensor at panloob na kaligtasan ng PIR Sensor EB-189

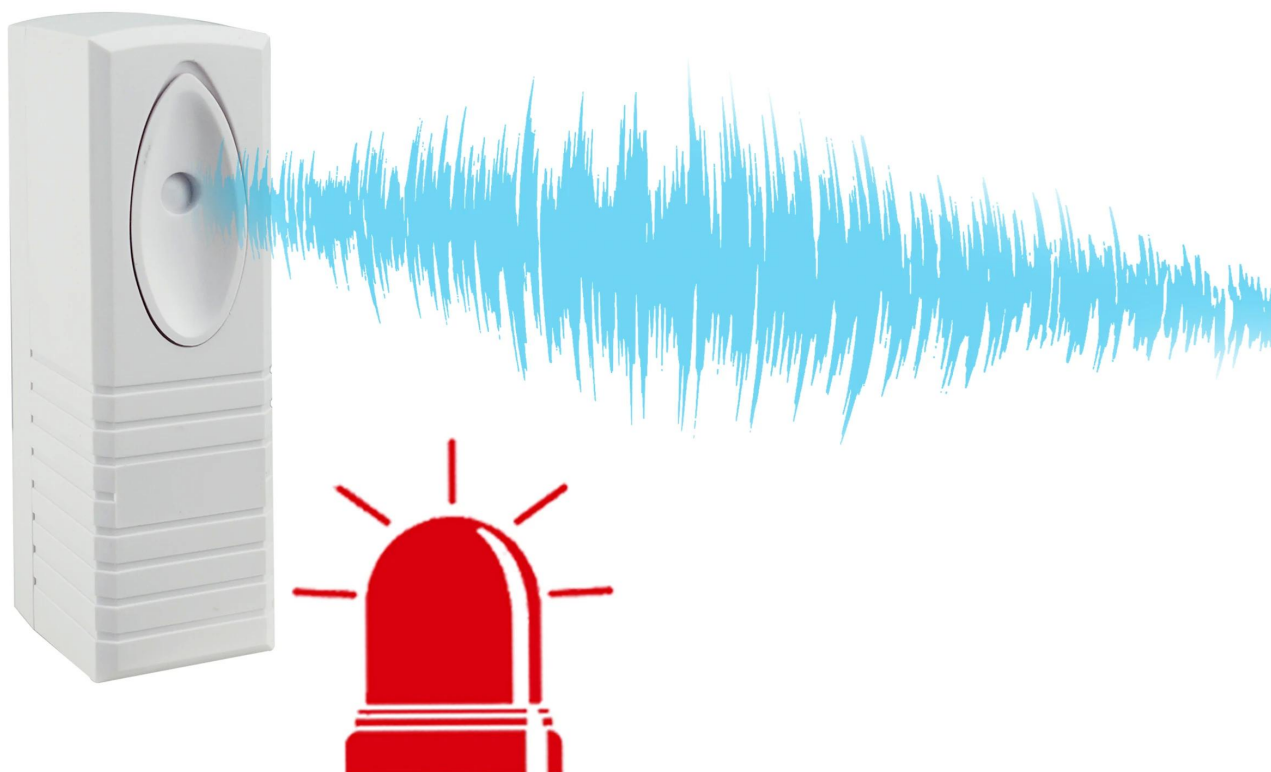

Pangunahing parameter ng EB-189

Pagtutukoy	
Pangalan ng Produkto	Wired acoustic vibration detector para sa marahas na alarm alarm
Model	EB-189
Laki	85 * 26 * 25mm
Paggawa boltahe	9 ~ 16V DC
Kasalukuyan	11mA (Sa ilalim ng 12V DC supply ng kuryente)
Pakikipag-ugnay sa alarma	0.1A, 24V, NC
Pakikipag-ugnay sa tamper	0.1A, 24V, NC
Paraan ng pag-install	naka-mount
Oras ng alarma	2.2s min
Temperatura ng pagtatrabaho	-10 °C ~ 50 °C
Imbakan ng temperatura	-25 °C ~ 65 °C
Kulay	Puti
Timbang	0.1kg

Mga Tampok

Ang EB-189 digital vibratory detector ay gumagamit ng mga international advanced na photoelectric sensor elemento na may teknolohiyang pagproseso ng CPU upang matiyak ang mahigpit na pagsubaybay para sa proteksyon na saklaw. nababagay na sensitivity ng tiktik upang maayos na balanse ang punto. Naaangkop ito sa awtomatikong teller machine (ATM) at pader at Glass at strongbox atbp. At maiwasan ang anumang pagkilos ng katok at pagkasira.

Anong mga tampok ang mayroon ng EB-189?


Size




PCB board display



Sensitivity
Adjustment

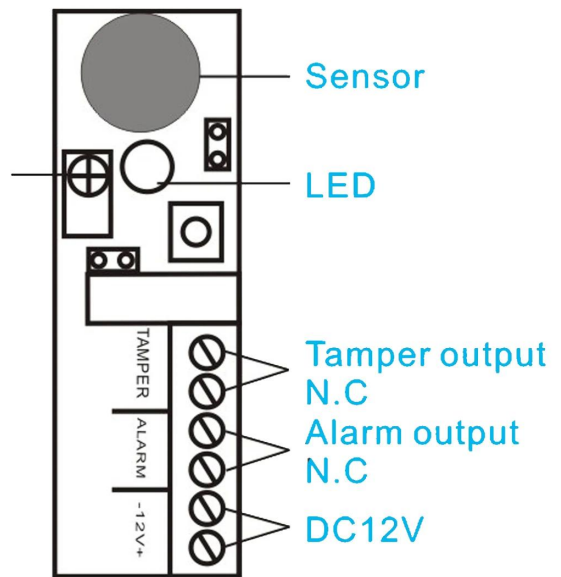

Where to use?

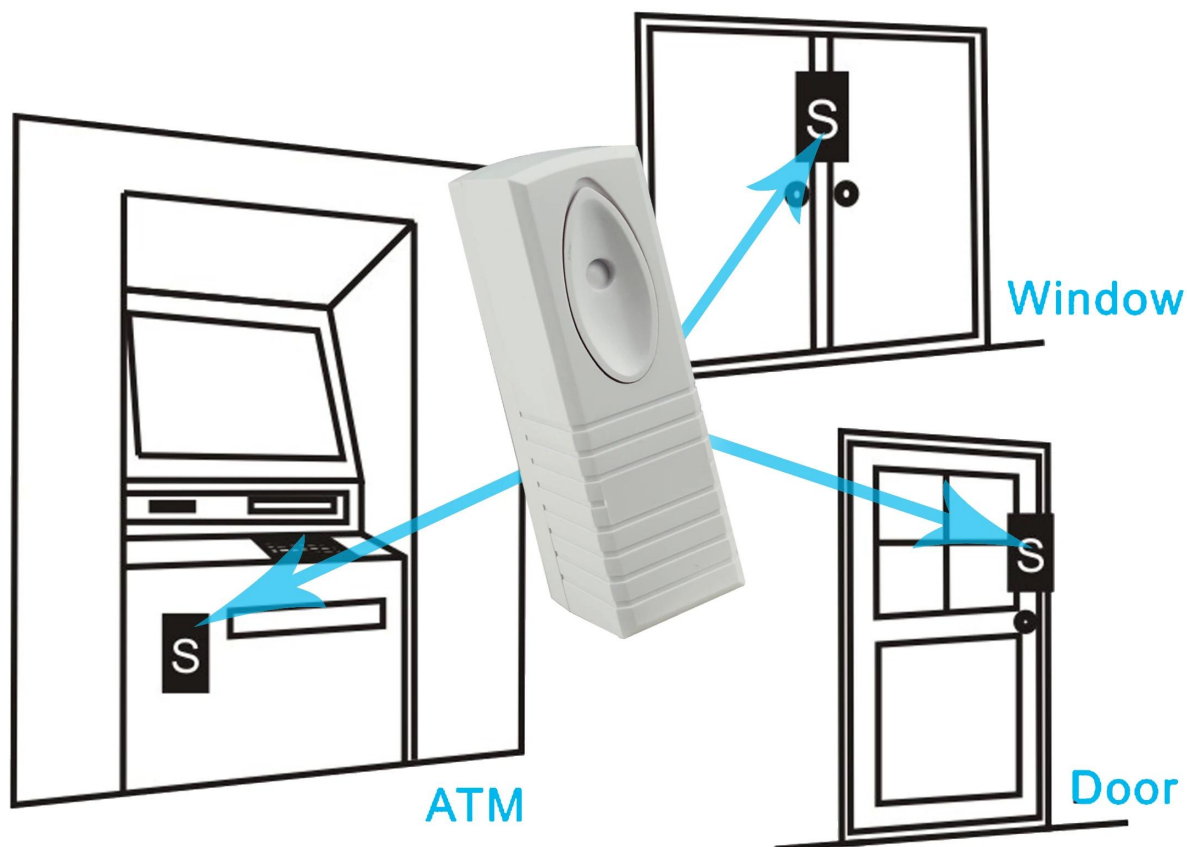

Note: detecting distance is different according different installation enviroment:concrete 1.5m , brick wall 2.5m, iron and steel 3m, glass 3.5m, wood 3.5m

Package



Weight:50g

Paano ang tungkol sa iba pang Choice?

SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



