

# Wired embedded magnetic contact

*NC/NO mode optional*

*35±5(mm) gap distance*


*Max voltage≤100VDC, Max current≤500mA*

*Suitable for metal door or window*

*White/Brown color optional*

*24g weight*

**SMQT®**

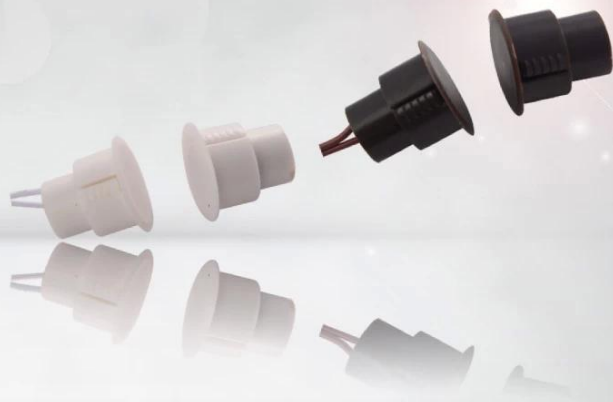

## • Parameter

**SMQT®**

<b>parametro</b>	
Pangalan ng Produkto	Emedded magnetic contact sensor
modelo	EB-136
sukat	Φ19 × 25 (mm)
code mode	NO / NC (opsyonal)
puwang	35 ± 5 (mm)
Max boltahe	≤100V DC
Max kasalukuyang	≤500mA
Max rating	≤10W
kulay	Brown / White (opsyonal)
suit para sa	Metal pinto o window
materyal	Fireproof ABS pabahay
Paggawa temperatura	-10 °C ~ 50 °C
net timbang	24g

## • In-kind shooting

**SMQT®**



• *Feature*

SMQT®



## EB-136

Dimension:	$\phi 19 * 25(\text{mm})$
Material:	ABS
Max Gap:	$\leq 40\text{mm}$
Install way:	Drill hole install
Wire :	22# wire 40cm
Power :	0.5A 10W

### Fire-proofing materials

Adopt ABS flame retardant material, fire retardant safer, connecting with 22 # wire, total length of 30 cm. Suitable for metal doors and cabinet door, etc.



### Waterproof seal

Using imported PC glue sealing, close the magnet and wiring, waterproof, and durable leakage, using more safe and more comfortable



### Strong magnetism

Magnetic strength, which can be installed directly drilling, stable performance.

## • Packaging & shipping

SMQT®

listahan packaging	
Pangalan ng Produkto	Emedded magnetic contact sensor EB-136
Dami	600 PC ng bawat karton
carton laki	38 * 30 * 30 (cm)
timbang	16kg



## • Office show

SMQT®



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....