

Wired embedded magnetic contact

NC/NO mode optional

35±5(mm) gap distance


Max voltage≤100VDC, Max current≤500mA

Suitable for metal door or window

White/Brown color optional

24g weight

SMQT

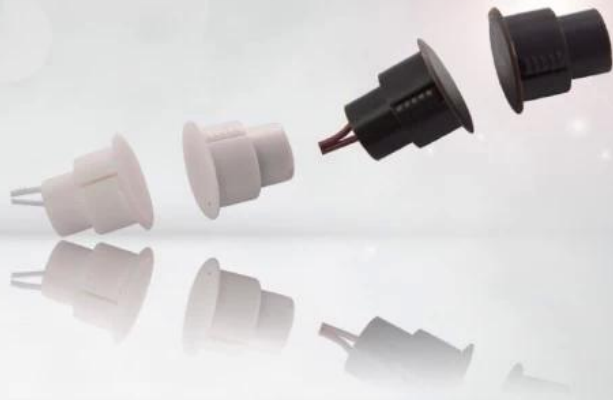

• Parameter

SMQT

detalye	
nanme Product	Wired Magnetic Door Contact Sensor
Model number	EB-136
Mga Dimensyon	Φ19 * 25 (mm)
koneksyon	Karaniwan bukas / normal sarado
operating distance	35 ± 5 (mm)
Maximum na presyon	≤100VDC
Load kasalukuyang	≤500mA
Working Power	≤10W
pabahay Material	ABS hindi masusunog materyal
hugis kulay	Brown / White
saklaw	Iron pinto o window
timbang ng produkto	24g

• Introduction

SMQT

Ang elektronikong door contact switch ay ang electronic pinto sensor para sa pinto alarma seguridad system at pinto access control system.

PRODUCT PICTURE



PRODUCT FEATURE



EB-136



Dimension: $\phi 19*25$ (mm)

Material: ABS

Max Gap: ≤ 40 mm

Install way: Drill hole install

Wire : 22# wire 40cm

Power : 0.5A 10W

Fire-proofing materials

Adopt ABS flame retardant material, fire retardant safer, connecting with 22 # wire, total length of 30 cm. Suitable for metal doors and cabinet door, etc.



Waterproof seal

Using imported PC glue sealing, close the magnet and wiring, waterproof, and durable leakage, using more safe and more comfortable



Strong magnetism

Magnetic strength, which can be installed directly drilling, stable performance.







● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....