




Pagtutukoy	
Pangalan ng Produkto:	Standalone smoke detector, wireless smoke sensor, smoke alarm
Laki:	Ø106mm * 59mm
Paggawa ng Boltahe:	9V 6F22 baterya
Kasalukuyang Standby:	≤15uA
Kasalukuyang Alarm:	≤56mA
Buhay sa Paggawa ng Baterya:	Mas mababa sa 1 taon
Tagapagpahiwatig ng Power:	Red LED
Tagapagdulot ng alarm:	Red LED flash blink
Presyon ng Tunog:	85dB / m
Temperatura ng Paggawa:	-10 ° C ~ 50 ° C
Paggawa ng Humidity:	≤95% RH
Pagpapadala ng Distance:	& lt; 100m (bukas na lugar)
Ipatupad ang criterion:	EN14604
Detecting area:	40 metro kuwadrado kapag taas ang pag-install sa pagitan ng 6 hanggang 12 metro. 20 square meters kapag taas ang pag-install sa loob ng 6 na metro.

Ano ang mga katangian ng aming detektor ng usok?

Standalone Gas detector

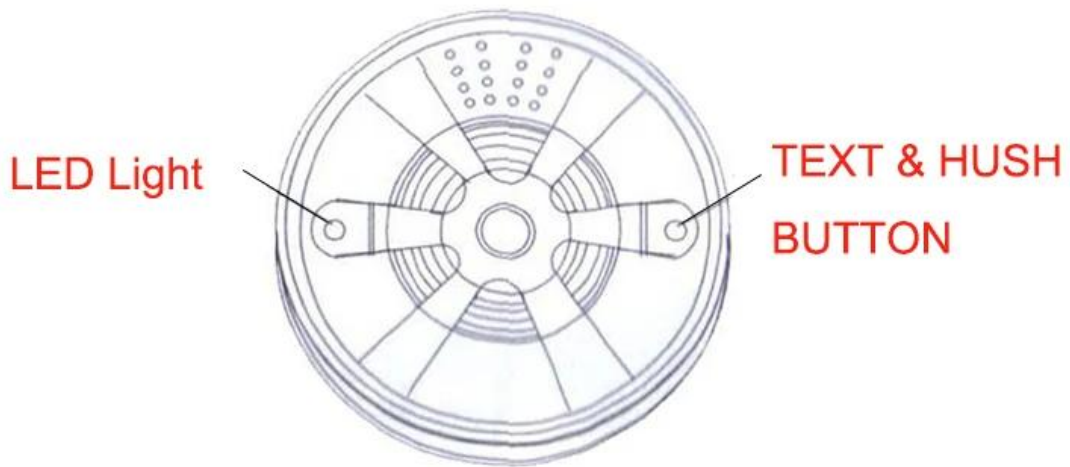

The detector adopts the reflection principle of smoke particles that can reflect infrared light. The main circuit includes a MCU processing Section, an infrared-emitting portion and an infrared receiving portion.



Detector will get into normal working state after connecting battery power, LED will flash once per every 42 seconds.

IN-KIND SHOOTING



IPAKITA ANG KASO



IPAKITA ANG TANGGAPAN



CUSTOMER



PAG-IBIG



CERTIFICATE



PAANO MAGAGAMIT



Trade terms:	EXW
Payment terms:	T/T, Western union, Paypal etc
Delivery time:	Normal order within 7 days, bulk order 10-15days
Packing:	Neutral paper box and paper carton
Shipping:	Express company or by sea, by air or appointed by buyer