

Wired magnetic door contact sensor

NO/NC mode optional

20±5(mm) gap distance


MAX Voltage≤100VDC,MAX current≤500mA

Suitable for wooden door or window

Fireproof ABS shell,White/Brown color optional

Weight10g

SMQT®

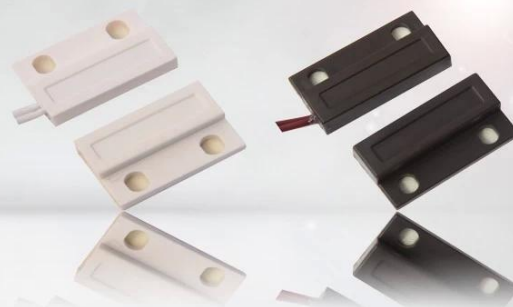

• Parameter

SMQT®

parametro	
Pangalan ng Produkto	Wired magnetic pinto sensor
modelo	EB-134
sukat	24 × 41 × 6 (mm)
code mode	NO / NC (opsyonal)
puwang	20 ± 5 (mm)
Max boltahe	≤100V DC
Max kasalukuyang	≤500mA
Max rating	≤10W
kulay	Brown / White (opsyonal)
suit para sa	kahoy na pinto o window
materyal	Fireproof ABS pabahay
Paggawa temperatura	-10 °C ~ 50 °C
net timbang	10g


• In-kind shooting

SMQT®



• *Feature*

SMQT

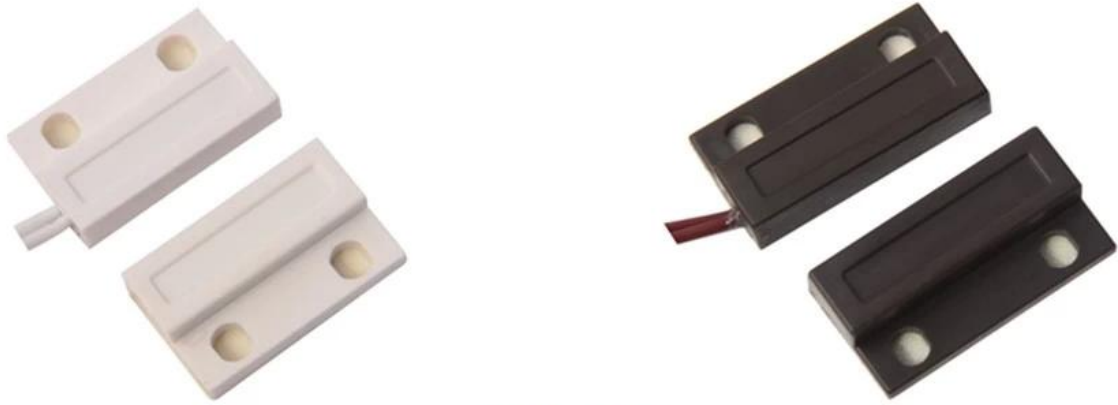

EB-134

Dimension:24×41×6(mm)

NO/NC mode optional(default is NC mode)

20±5(mm) Gap

MAX voltage≤100VDC,MAX current≤500mA

Suitable for Wooden door or window

Fireproof ABS material shell

White/Brown color optional

Weight 10g

Welcome OEM, 2 years quality warranty

•Packaging & shipping

SMQT

listahan packaging	
Pangalan ng Produkto	EB-134
Dami	1600 PC ng bawat karton
carton laki	38 * 30 * 30 (cm)
timbang	20kg



WE LOGISTICS



• Office show

SMQT



• Exhibition

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....