

12v DC 24V DC Wired smoke detector alarm



Product Name:	12v DC 24V DC Wired smoke detector alarm
Dimension:	Φ104×51 mm
Operating voltage:	DC 24V
Static current:	≤2mA
Alarm current:	≤15mA
Enviroment temp:	-10°C~+50°C
Alarm output:	NO/NC
Alarm mode:	LED indication network output
Detection range:	20 sqm
Reset mode:	auto/power off reset
Weight:	222g

Product Features



What Features of our smoke detector?



1.Wired photoelectric smoke detector


2.CE&ROHS certificate

3.4 wires terminal


4.Suitable for fire alarm and alarm system

5.2 years warranty , welcome OEM

IN-KIND SHOOTING

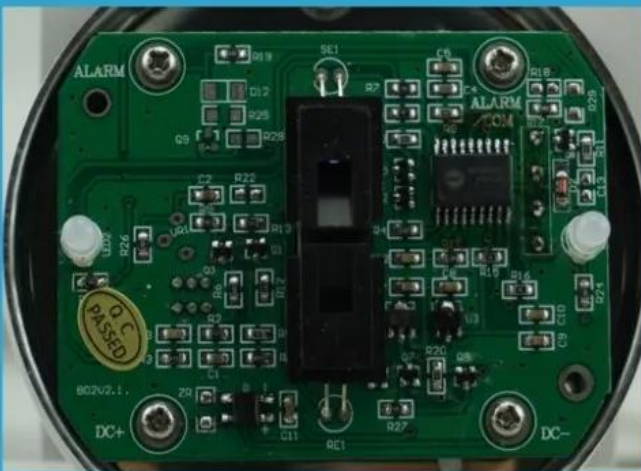

APPLICATION

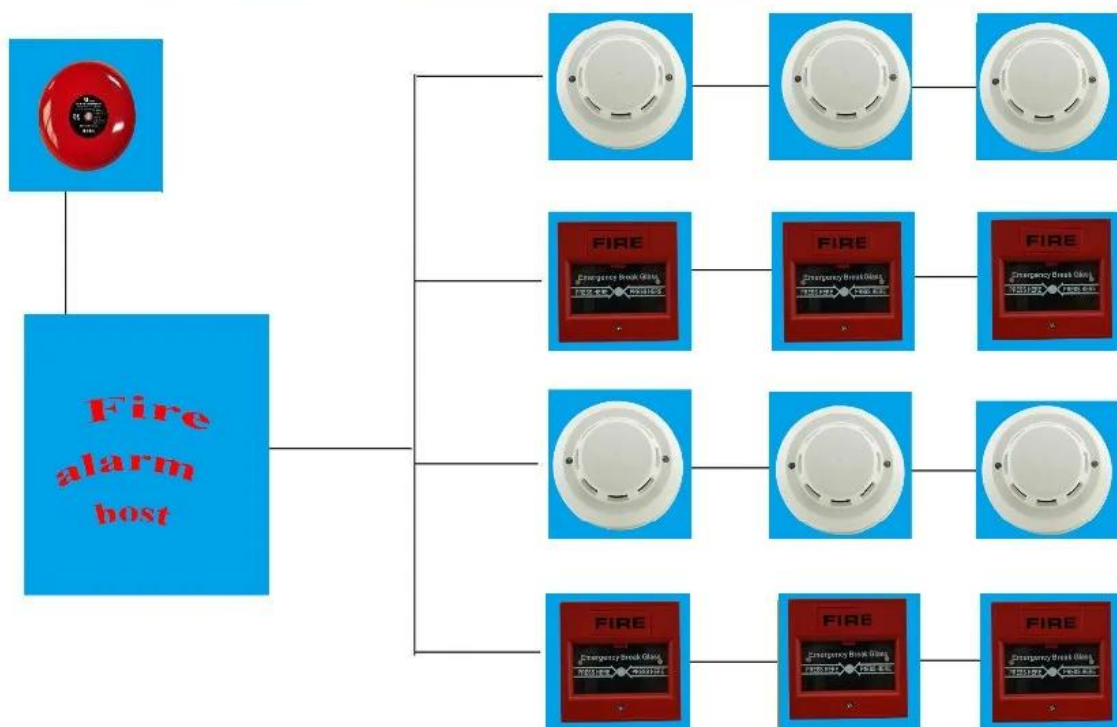

Related Items

SHOW CASE



Company Information

OFFICE SHOW



CUSTOMER



EXHIBITION

2011 Brazil Fair



2012 shen yang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



CERTIFICATE



HOW TO COOPERATION



Trade terms:	EXW
Payment terms:	T/T, Western union, Paypal etc
Delivery time:	Normal order within 7 days, bulk order 10-15days
Packing:	Neutral paper box and paper carton
Shipping:	Express company or by sea, by air or appointed by buyer

FAQ

FAQ

Q: Can I have a sample order?

A: Yes, we are willing to offer trial sample order to you for quality test. Mixed samples are acceptable.

Q: What is the lead time?

A: Sample needs 1-3 working days, mass production time needs 10-15 working days for order less than 5000pcs.

Q: Do you have any MOQ limit?

A: EXW MOQ is 100pcs under blank box.

Q: How do you ship the goods and how long does it take arrive?

A: The sample will be sent to you by optional shipping service (couriers, air, and sea). The delivery time depends on the shipping service.

Q: How will we proceed the order if I have logo to print?

A: Firstly, we will prepare artwork for visual confirmation. If the color and position are right, we would make sampling firstly from silk print factory and take picture for your second confirmation before mass production.

Q: Does alarm panel work with any sensor?

A: The alarm panel can work with all dry contact wired detectors and wireless detector, including almost all of the wireless sensors from Chinese manufacturers. The wireless encode and decode is EV1527 or our wireless sensors.

