

Wired infrared 2 beams perimeter detector



no intruding
no across

• Parameter

SMQT®

Product name	Outdoor waterproof Beam sensor
Model number	ABT
Operating voltage	13.8~24VDC 11~28VAC
Operating current	40-65mA
Indication speed	50~700m/sec
Anti-demolition output	NC
Environment temperature	-20°C~+50°C
Alarm output	NO/NC
Level adjustment	180°±90°
Vertical adjustment	±10°
Color	Black
Material	PC resin

• Introduction

SMQT®

PRODUCT PICTURE




The infrared beam barrier motion detector is used on the fence like the

infrared fence detector work with the alarm system.

• Dimension

SMQT[®]

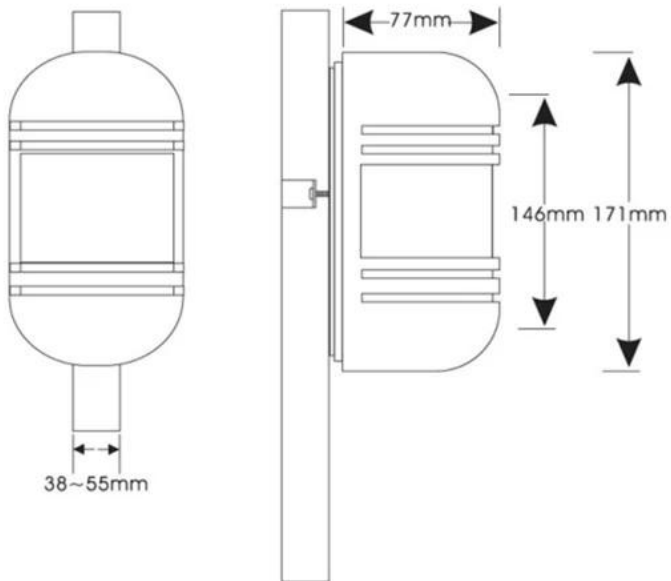

• Feature

SMQT[®]

PRODUCT FEATURE



Sealed integration structure is able to work in the harsh environment

Automatically regulate to confront with fog or inclement weather

Sensitivity(AGC circuit)

easily adjust and calibrate the horizontal/vertical optional angle

Built-in integrate optical telescopes, anti-jamming jacket

Anti-lighting circuit designed

High-power infrared receiver on the tubes, low-power digital

• *Packaging & shipping*

SMQT®



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....