

Wired infrared 2 beams perimeter detector



no intruding
no across

• Parameter

SMQT®

Product name	Outdoor waterproof Beam sensor
Model number	ABT
Operating voltage	13.8~24VDC 11~28VAC
Operating current	40-65mA
Indication speed	50~700m/sec
Anti-demolition output	NC
Environment temperature	-20°C~+50°C
Alarm output	NO/NC
Level adjustment	180°±90°
Vertical adjustment	±10°
Color	Black
Material	PC resin

• Introduction

SMQT®

PRODUCT PICTURE




The infrared beam barrier motion detector is used on the fence like the

infrared fence detector work with the alarm system.

•Dimension

SMQT[®]

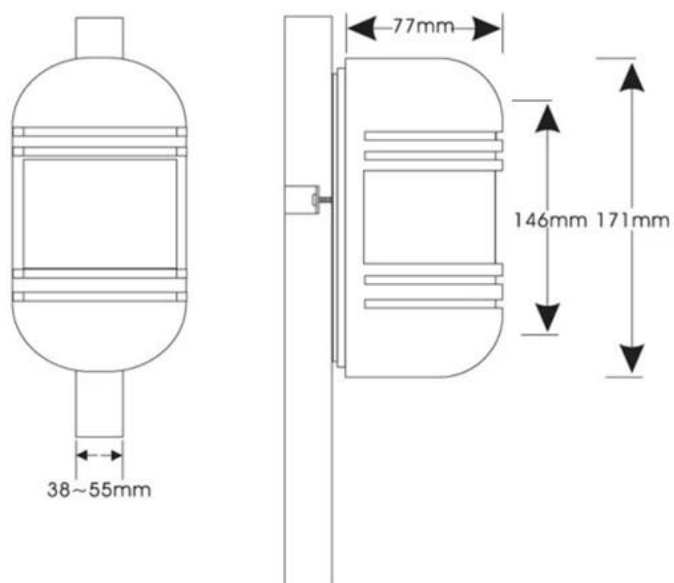

•Feature

SMQT[®]

PRODUCT FEATURE



Sealed integration structure is able to work in the harsh environment

Automatically regulate to confront with fog or inclement weather

Sensitivity (AGC circuit)

easily adjust and calibrate the horizontal/vertical optional angle

Built-in integrated optical telescopes, anti-jamming jacket

Anti-lighting circuit designed

High-power infrared receiver on the tubes, low-power digital

• *Packaging & shipping*

SMQT®



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

