


Parameter				
Product name	Access control serial to tcp/ip converter,ethernet rs485 converter			
Model	EA-06			
Dimension	92L * 63W * 23H (mm)			
External power supply	DC4.5V ~ 5.5V			
Serial protocol	TCP / UDP / IP / ICMP, Ethernet, ARP			
Communication Interface	Ethernet (10Base-T), RS232 / 485 with terminal switch			
Signal indication	Three signal lights TXD RXD POWER			
Transmission medium	Shielded twisted pair wire			
Transmission rate	300bps ~ 115200bps			
Isolation	3500VRMS			
Color	grey			
Usage	Data transmission			
Relative Humidity	5%~95%			
Environment temprature	0 °C ~ 50 °C			
Net weight	0.624kg			

What Features of our serial to tcp/ip converter?



IN-KIND SHOOTING

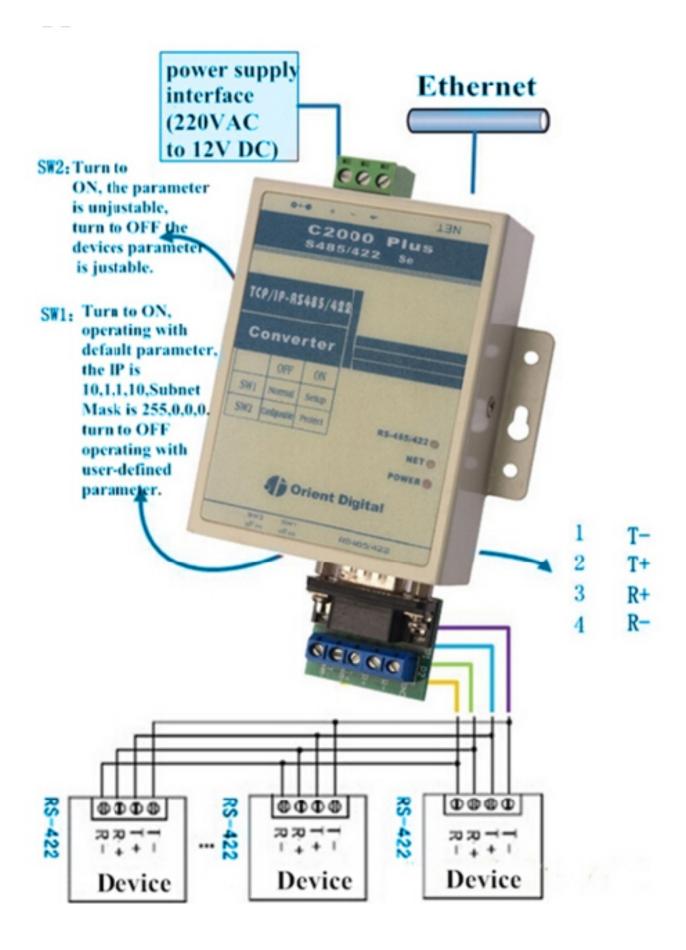















APPLICATION



1.Converter RS232/485 to TCP/IP

2.Dimention: 96x63x23mm

3.Interface: ethernet(10Base-T), RS232/485 with 6 writing terminals

4.Format: TCP/UDP/IP/ICMP, Ethernet, APR

5. Welcome OEM and 2 years quality warranty

SHOW CASE







OFFICE SHOW













CUSTOMER














EXHIBITION



CERTIFICATE



HOW TO COOPERATION

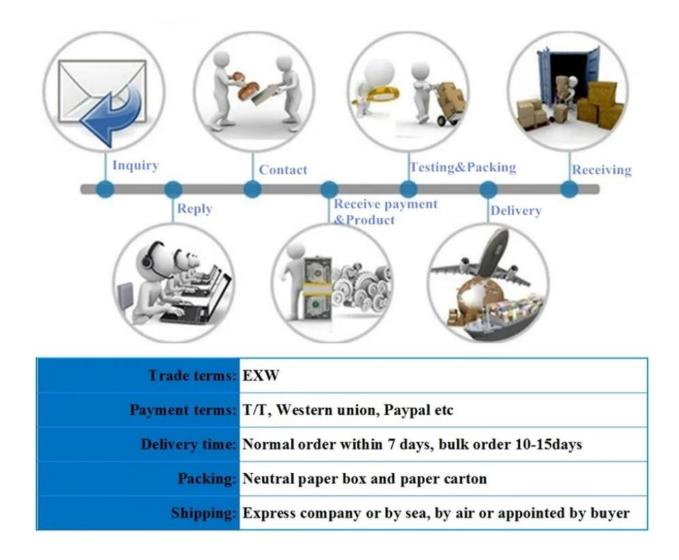

FAQ

Q:Can I have a sample order?

A:Yes, we are willing to offer trial sample order to you for quality test. Mixed samples are acc eptable.

O: What is the lead time?

A:Sample needs 1-3 working days, mass production time needs 10-15 working days for order less than 5000pcs.

Q: Do you have any MOQ limit?

A:EXW MOQ is 100pcs under blank box.

Q: How do you ship the goods and how long does it take arrive?

A:The sample will be sent to you by optional shipping service (couriers, air, and sea). The delivery time depends on the shipping service.

Q:How will we proceed the order if I have logo to print?

A:Firstly, we will prepare artwork for visual confirmation. If the color and position are right, we would make sampling firstly from silk print factory and take picture for your second confirmation before mass production.

Q: Does alarm panel work with any sensor?

A:The alarm panel

can work with all dry contact wired detectors and wireless detector, including almost all

of the wireless sensors from Chinese manufacturers. The wireless encode and decode is EV15 27 or our wireless sensors.